



TESTING LABORATORY
CERTIFICATE#4323.01



FCC PART 15.247

TEST REPORT

For

ESPRESSIF SYSTEMS (SHANGHAI) CO., LTD

Suite 204, Block 2, 690 Bibo Road, Zhang Jiang Hi-Tech Park, Shanghai, 201203 China

FCC ID: 2AC7Z-ESP32S2WROVER

Report Type: Original Report	Product Type: Wi-Fi Internet of Things Module
Test Engineer: Jack Jiao	<i>Jack Jiao</i>
Report Number: RSHD190920001-00A	
Report Date: 2019-10-18	
	Oscar Ye
Reviewed By: EMC Manager	<i>Oscar Ye</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....4

 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)4

 OBJECTIVE4

 RELATED SUBMITTAL(S)/GRANT(S).....4

 TEST METHODOLOGY4

 MEASUREMENT UNCERTAINTY.....5

 TEST FACILITY5

SYSTEM TEST CONFIGURATION.....6

 DESCRIPTION OF TEST CONFIGURATION6

 EQUIPMENT MODIFICATIONS6

 EUT EXERCISE SOFTWARE6

 SUPPORT EQUIPMENT LIST AND DETAILS9

 EXTERNAL I/O CABLE.....9

 BLOCK DIAGRAM OF TEST SETUP9

SUMMARY OF TEST RESULTS11

TEST EQUIPMENT LIST12

FCC §1.1310 & §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE)13

FCC §15.203 - ANTENNA REQUIREMENT.....14

 APPLICABLE STANDARD14

 ANTENNA CONNECTOR CONSTRUCTION14

FCC §15.207 (a) - AC LINE CONDUCTED EMISSIONS.....15

 APPLICABLE STANDARD15

 EUT SETUP15

 EMI TEST RECEIVER SETUP.....15

 TEST PROCEDURE15

 FACTOR & OVER LIMIT CALCULATION.....16

 TEST RESULTS SUMMARY16

 TEST DATA16

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....21

 APPLICABLE STANDARD21

 EUT SETUP.....21

 EMI TEST RECEIVER SETUP.....22

 TEST PROCEDURE22

 CORRECTED FACTOR & OVER LIMIT CALCULATION (FOR BELOW 1GHZ)22

 CORRECTED AMPLITUDE & MARGIN CALCULATION (FOR ABOVE 1GHZ).....22

 TEST RESULTS SUMMARY23

 TEST DATA23

FCC §15.247(a) (2) - 6 dB EMISSION BANDWIDTH68

 APPLICABLE STANDARD68

 TEST PROCEDURE68

 TEST DATA68

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....76

 APPLICABLE STANDARD76

 TEST PROCEDURE76

 TEST DATA76

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....78

 APPLICABLE STANDARD78

TEST PROCEDURE	78
TEST DATA	78
FCC §15.247(e) - POWER SPECTRAL DENSITY	83
APPLICABLE STANDARD	83
TEST PROCEDURE	83
TEST DATA	83

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	ESPRESSIF SYSTEMS (SHANGHAI) CO., LTD
Tested Model	ESP32-S2-WROVER
Series Model	ESP32-S2-WROVER-I
Model Difference	Model Names and Antenna type
Product Type	Wi-Fi Internet of Things Module
Power Supply	DC 3.0~3.6V
Dimension	18.0mm (L)* 31.0mm (W)*3.3mm (H)

**All measurement and test data in this report was gathered from production sample serial number: 20190920001(ESP32-S2-WROVER),20190920002(ESP32-S2-WROVER-I).(Assigned by the BACL. The EUT supplied by the applicant was received on 2019-09-20).*

Note: the model(ESP32-S2-WROVER) was test all items, the model(ESP32-S2-WROVER-I) only be test AC Line Conducted Emissions and Spurious Emissions.

Objective

This report is prepared on behalf of *ESPRESSIF SYSTEMS (SHANGHAI) CO., LTD* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions' rules.

The tests were performed in order to determine Compliant with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No related submittal/grant.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliant Testing of Unlicensed Wireless Devices and FCC 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliant Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Test channel list is as below:

For 802.11b, 802.11g and 802.11n-HT20 mode, EUT was tested with Channel 1, 6 and 11;

For 802.11n-HT40 mode, EUT was tested with Channel 3, 6 and 9.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software


RF test tool: esp32

Pre-scan with all the data rates, and the worst case was performed as below:


Mode	Data Rate	Power Setting
802.11b	1 Mbps	0
		0
		0
802.11g	6 Mbps	8
		8
		8
802.11n-HT20	MCS0	8
		8
		8
802.11n-HT40	MCS0	14
		14
		14

Duty Cycle:


802.11b Mode Middle Channel

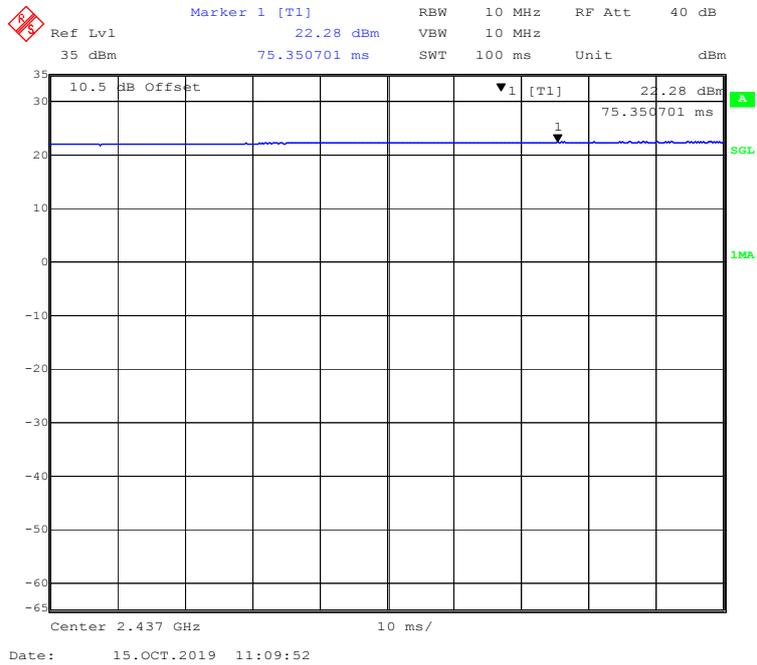


802.11g Mode Middle Channel

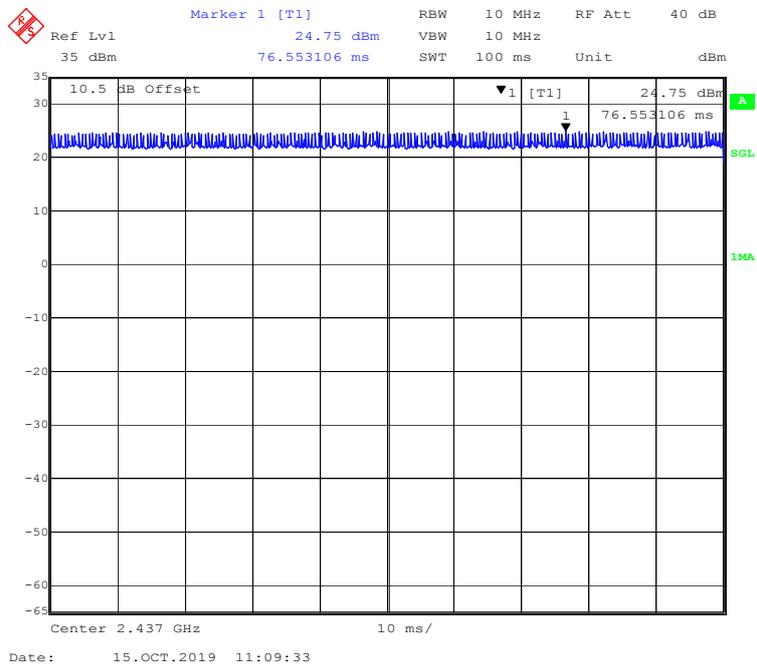

802.11n-HT20 Mode Middle Channel

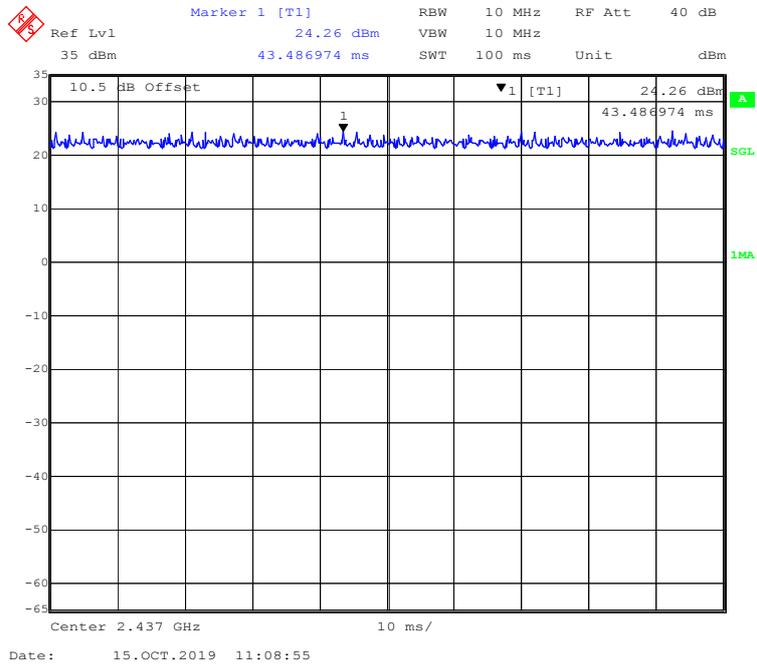

802.11n-HT40 Mode Middle Channel

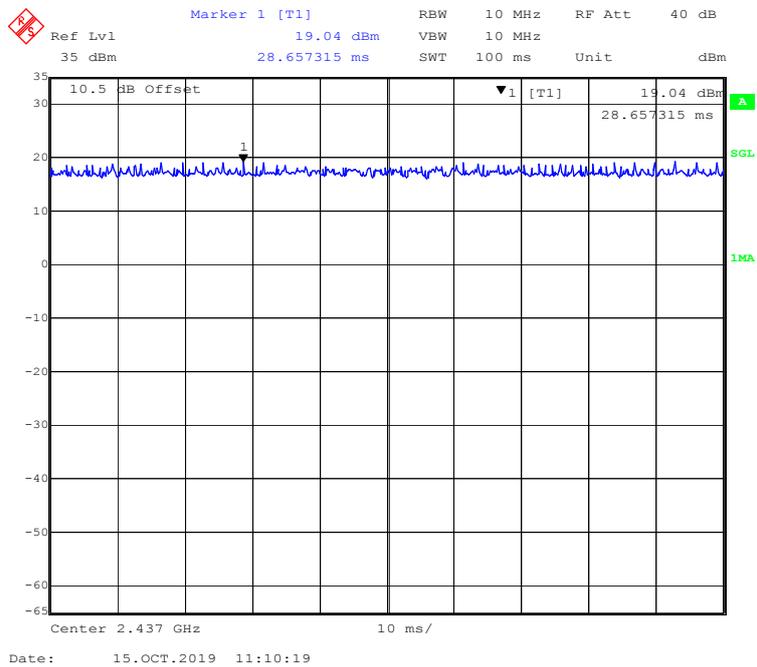

Mode	Duty Cycle (%)	T(ms)	1/T(kHz)	10log(1/x)
802.11b	100	/	/	0
802.11g	100	/	/	0
802.11n-HT20	100	/	/	0
802.11n-HT40	100	/	/	0

Note: “x” means the Duty Cycle.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
SHEN ZHEN TIANYIN ELECTRONICS CO.,LTD.	Adapter	YMK-6W050100	/
/	Debugging Board	/	/

External I/O Cable


Cable Description	Length (m)	From Port	To
USB Cable	1.0	Debugging Board	Adapter

Block Diagram of Test Setup


For Conducted Emissions:

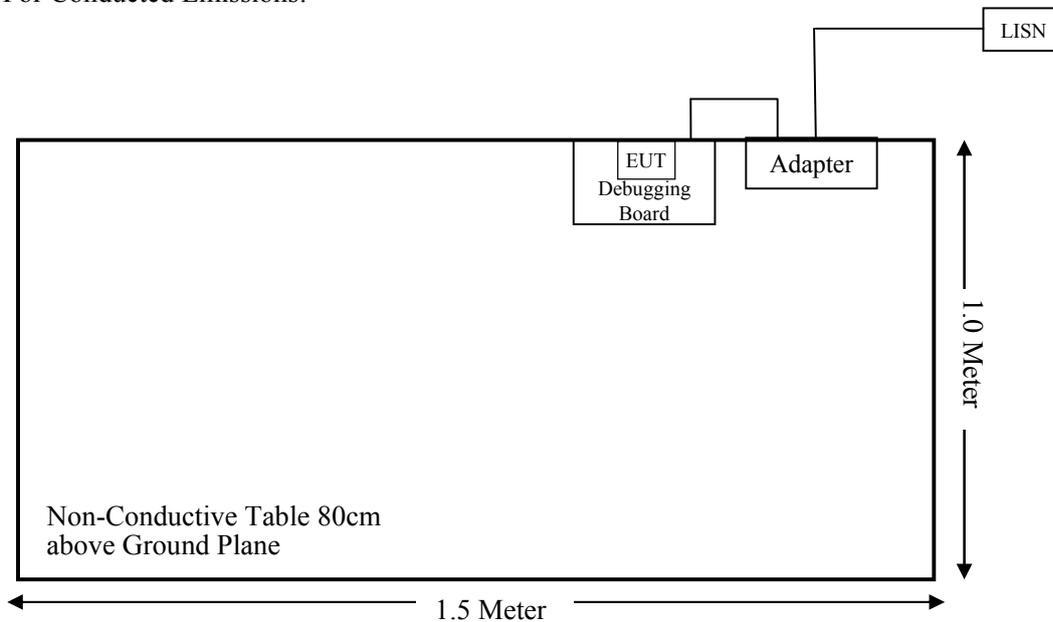

For Radiated Emissions(Below 1GHz):

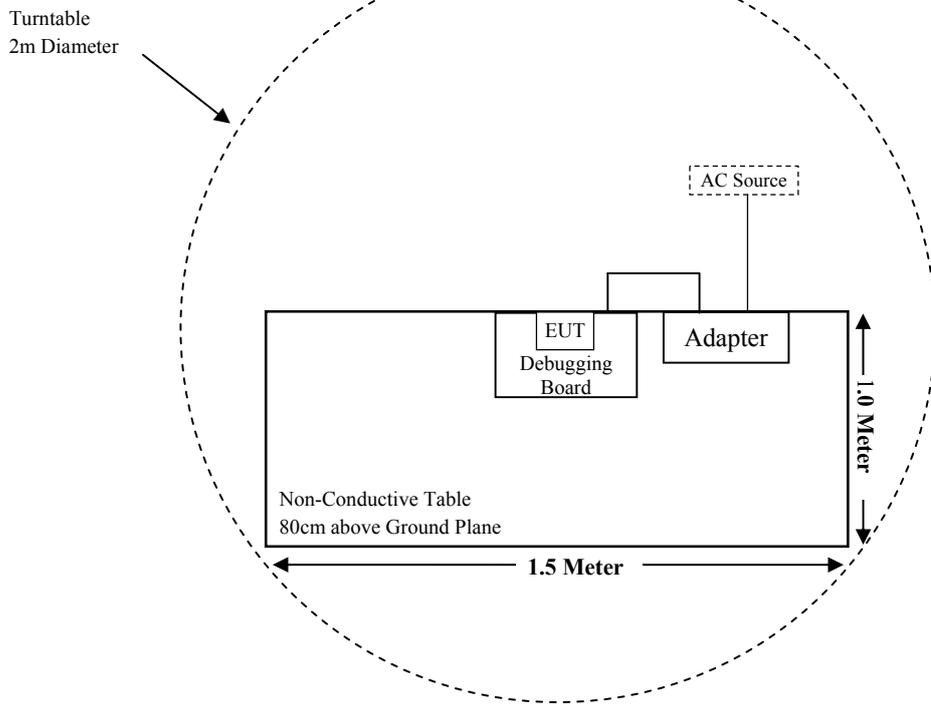

For Radiated Emissions(Above 1GHz):

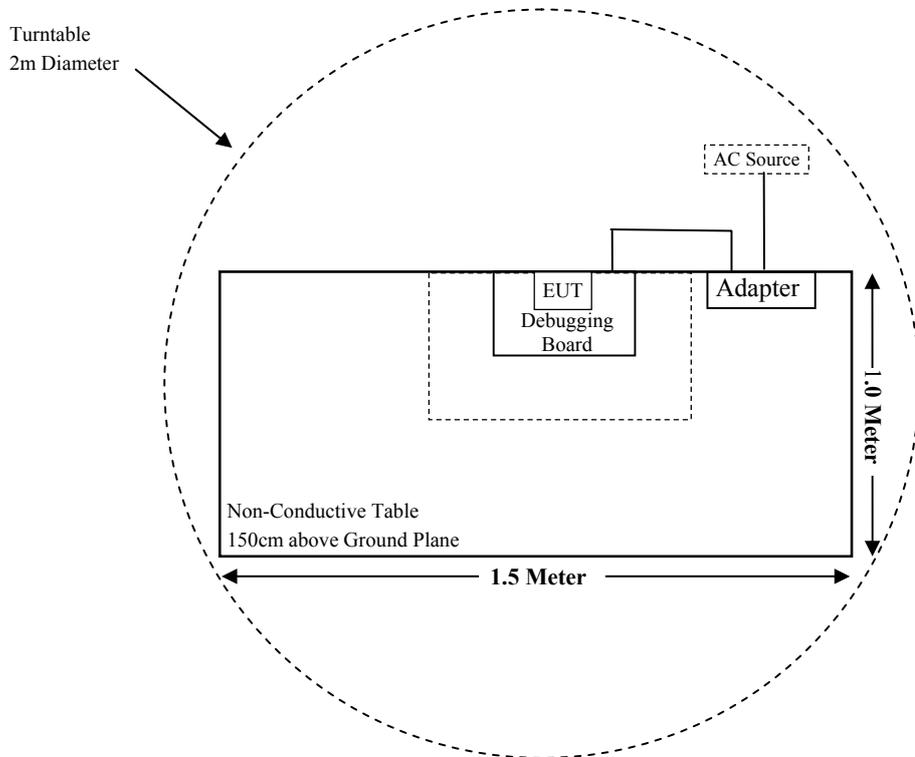

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310 & §2.1091	MAXIMUM PERMISSIBLE EXPOSURE (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.247(d)	Spurious Emissions at Antenna Port	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test receiver	ESR	1316.3003K03-102454-Qd	2019-06-25	2020-06-24
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2016-12-26	2019-12-25
Sonoma Instrument	Pre-amplifier	310N	171205	2019-08-14	2020-08-13
Audix	Test Software	e3	V9	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-8	008	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2019-08-15	2020-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2019-05-30	2020-05-29
ETS-LINDGREN	Horn Antenna	3115	9207-3900	2017-07-15	2020-07-14
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-12-12	2019-12-11
A.H.Systems, inc	Amplifier	2641-1	491	2019-02-20	2020-02-19
SELECTOR	Amplifier	EM18G40G	060726	2019-03-22	2020-03-21
MICRO-TRONICS	Band Reject Filter	BRM50702	G024	2019-08-05	2020-08-04
Narda	Attenuator	10dB	010	2019-08-15	2020-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-6	006	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2019-08-15	2020-08-14
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2018-11-30	2019-11-29
Agilent	Power Meter	N1912A	MY5000492	2018-11-18	2019-11-17
Agilent	Power Sensor	N1921A	MY54210024	2018-11-18	2019-11-17
Narda	Attenuator	6dB	006	2019-01-10	2020-01-09
ESPRESSIF	RF Cable	ESPRESSIF C01	C01	Each Time	/
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2019-07-11	2020-07-10
Rohde & Schwarz	LISN	ENV216	3560655016	2018-11-30	2019-11-29
Audix	Test Software	e3	V9	N/A	N/A
Narda	Attenuator/6dB	10690812-2	26850-6	2019-01-10	2020-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2019-08-15	2020-08-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310 & §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart §2.1091 and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency Range (MHz)	Antenna Gain		Tune up Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm²)	MPE Limit (mW/cm²)
		(dBi)	(numeric)	(dBm)	(mW)			
802.11b	2412~2462	3.40	2.19	21.50	141.25	20	0.0615	1.0
802.11g		3.40	2.19	23.00	199.53	20	0.0869	1.0
802.11 n-HT20		3.40	2.19	23.50	223.87	20	0.0975	1.0
802.11 n-HT40	2422~2452	3.40	2.19	23.00	199.53	20	0.0869	1.0

Note: The tune up conducted power was declared by the manufacturer.

Conclusion: The EUT meets exemption requirement - RF exposure evaluation greater than 20cm distance specified in § 2.1091. If the device built into a host as a portable usage, the additional RF exposure evaluation may be required as specified by§ 2.1093.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine Compliant with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
 - b. Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has a PCB antenna which was permanently attached and a Dipole antenna with a unique type of connector; fulfill the requirement of this section. Please refer to the EUT photos.

Model	Antenna Type	Max. Antenna Gain
ESP32-S2-WROVER	PCB	3.40dBi
ESP32-S2-WROVER-I	Dipole	2.33dBi


Result: Compliant.

FCC §15.207 (a) - AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

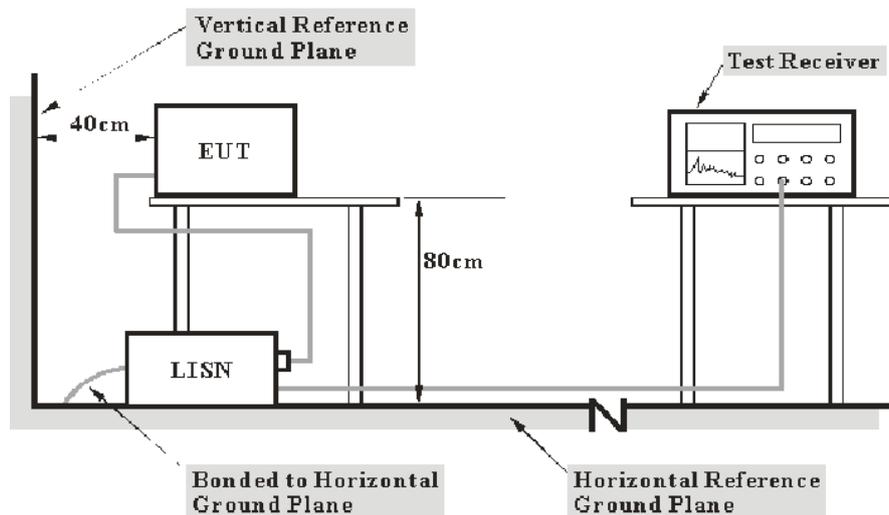

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

ANSI C63.10-2013 clause 6.2

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Over Limit Calculation

The Factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7 dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} - \text{Limit (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data

Environmental Conditions


Temperature:	23.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.3kPa

The testing was performed by Jack Jiao on 2019-10-16.

EUT operation mode: Transmitting in 802.11b mode middle channel (worst case)

Model: ESP32-S2-WROVER
AC 120V/60 Hz, Line


Date: 2019-10-16

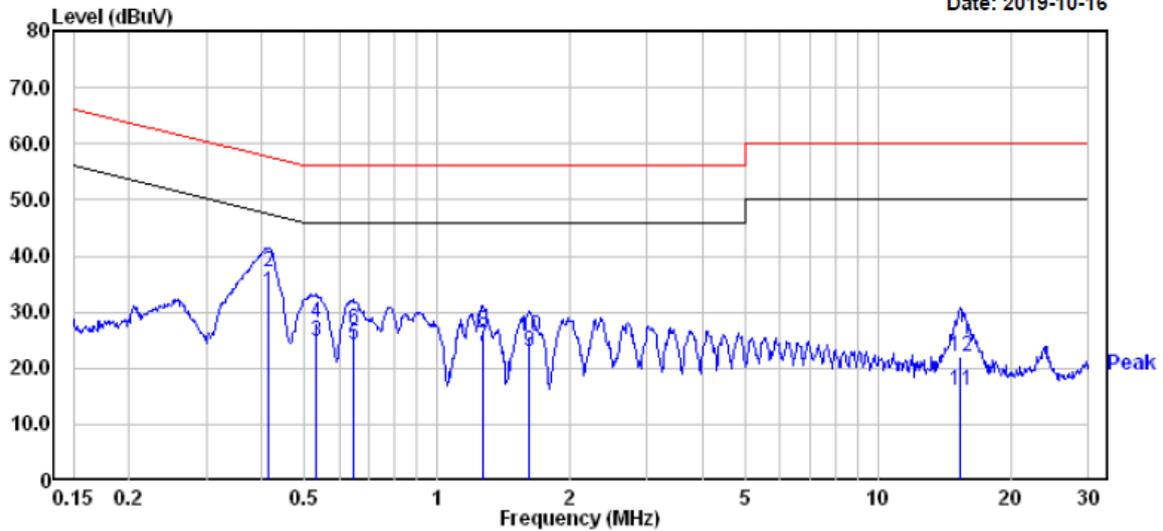

	Read Freq	Read Level	Factor	Limit Level	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dB	
1	0.415	13.90	19.74	33.64	47.55	-13.91 Average
2	0.415	17.30	19.74	37.04	57.55	-20.51 QP
3	0.532	5.01	19.75	24.76	46.00	-21.24 Average
4	0.532	8.21	19.75	27.96	56.00	-28.04 QP
5	0.647	4.50	19.75	24.25	46.00	-21.75 Average
6	0.647	7.10	19.75	26.85	56.00	-29.15 QP
7	1.269	3.90	19.82	23.72	46.00	-22.28 Average
8	1.269	6.70	19.82	26.52	56.00	-29.48 QP
9	1.619	3.10	19.84	22.94	46.00	-23.06 Average
10	1.619	5.70	19.84	25.54	56.00	-30.46 QP
11	15.388	-3.79	19.65	15.86	50.00	-34.14 Average
12	15.388	2.31	19.65	21.96	60.00	-38.04 QP

AC 120V/60 Hz, Neutral

Date: 2019-10-16

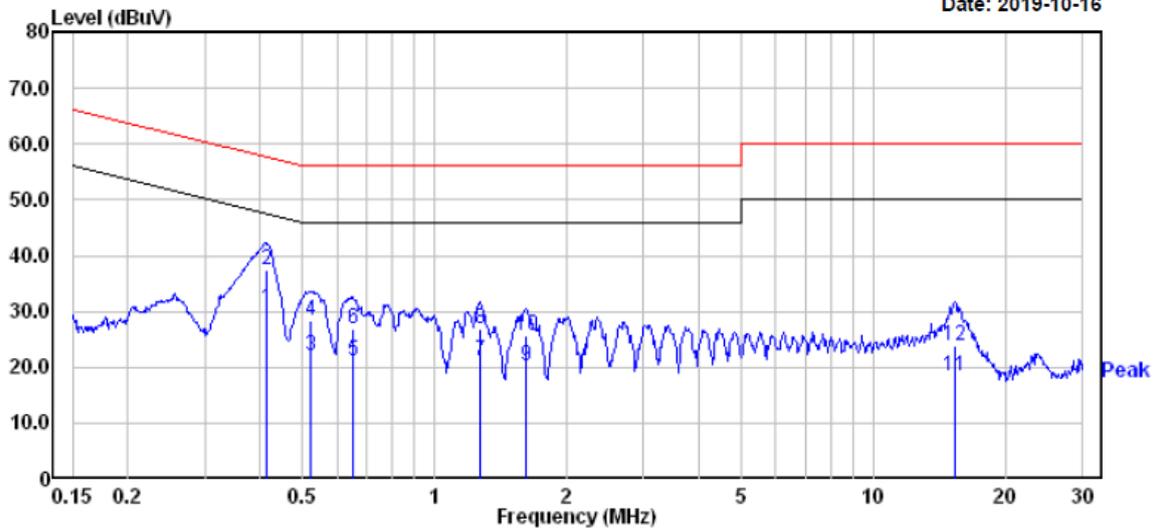


	Read Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.415	10.80	19.74	30.54	47.55	-17.01	Average
2	0.415	17.70	19.74	37.44	57.55	-20.11	QP
3	0.521	2.40	19.76	22.16	46.00	-23.84	Average
4	0.521	8.50	19.76	28.26	56.00	-27.74	QP
5	0.651	1.30	19.75	21.05	46.00	-24.95	Average
6	0.651	7.20	19.75	26.95	56.00	-29.05	QP
7	1.269	1.30	19.82	21.12	46.00	-24.88	Average
8	1.269	7.00	19.82	26.82	56.00	-29.18	QP
9	1.619	0.50	19.84	20.34	46.00	-25.66	Average
10	1.619	5.80	19.84	25.64	56.00	-30.36	QP
11	15.307	-1.30	19.65	18.35	50.00	-31.65	Average
12	15.307	4.30	19.65	23.95	60.00	-36.05	QP

EUT operation mode: Transmitting in 802.11b mode middle channel (worst case)

Model: ESP32-S2-WROVER-I
AC 120V/60 Hz, Line


Date: 2019-10-16

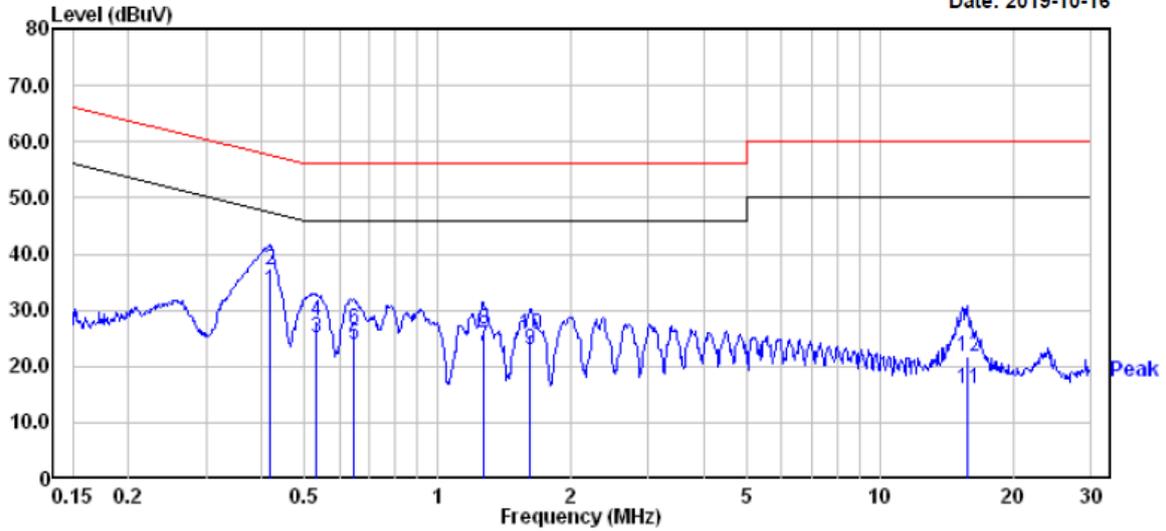

	Read Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.417	13.80	19.74	33.54	47.51	-13.97	Average
2	0.417	17.40	19.74	37.14	57.51	-20.37	QP
3	0.529	5.41	19.75	25.16	46.00	-20.84	Average
4	0.529	8.31	19.75	28.06	56.00	-27.94	QP
5	0.644	4.00	19.75	23.75	46.00	-22.25	Average
6	0.644	6.90	19.75	26.65	56.00	-29.35	QP
7	1.269	3.80	19.82	23.62	46.00	-22.38	Average
8	1.269	6.60	19.82	26.42	56.00	-29.58	QP
9	1.619	3.00	19.84	22.84	46.00	-23.16	Average
10	1.619	5.80	19.84	25.64	56.00	-30.36	QP
11	15.801	-3.70	19.69	15.99	50.00	-34.01	Average
12	15.801	2.10	19.69	21.79	60.00	-38.21	QP

AC 120V/60 Hz, Neutral

Date: 2019-10-16

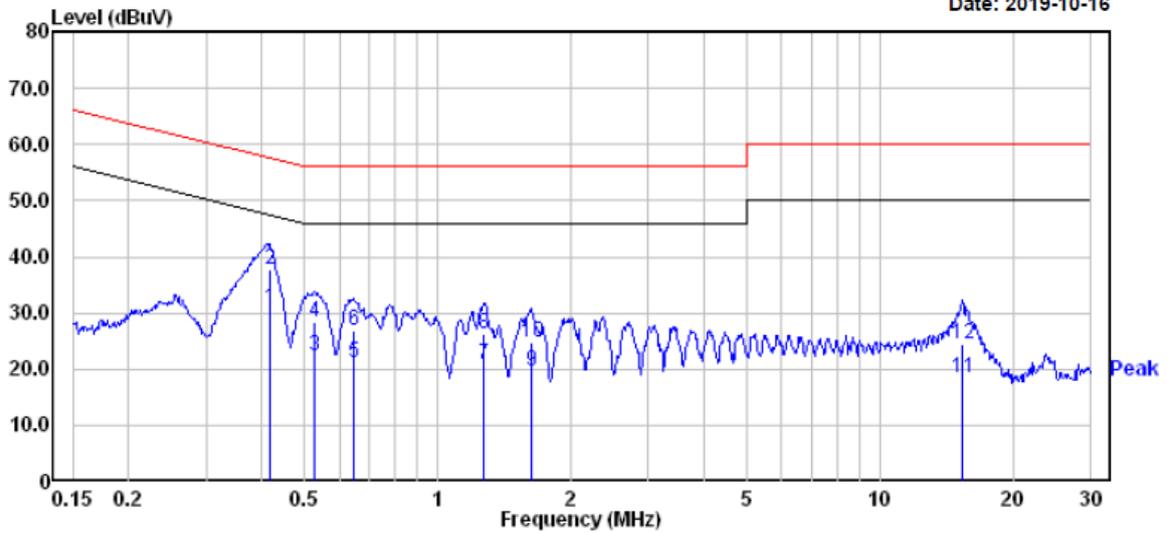

	Read Freq	Read Level	Factor	Limit Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.417	11.00	19.74	30.74	47.51	-16.77	Average
2	0.417	18.00	19.74	37.74	57.51	-19.77	QP
3	0.527	2.71	19.75	22.46	46.00	-23.54	Average
4	0.527	8.71	19.75	28.46	56.00	-27.54	QP
5	0.644	1.30	19.75	21.05	46.00	-24.95	Average
6	0.644	7.20	19.75	26.95	56.00	-29.05	QP
7	1.276	1.10	19.82	20.92	46.00	-25.08	Average
8	1.276	6.50	19.82	26.32	56.00	-29.68	QP
9	1.636	-0.10	19.84	19.74	46.00	-26.26	Average
10	1.636	5.00	19.84	24.84	56.00	-31.16	QP
11	15.388	-1.29	19.65	18.36	50.00	-31.64	Average
12	15.388	4.71	19.65	24.36	60.00	-35.64	QP

Note:

- 1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Over Limit (dB) = Read level (dBμV) + Factor (dB) - Limit (dBμV)


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:

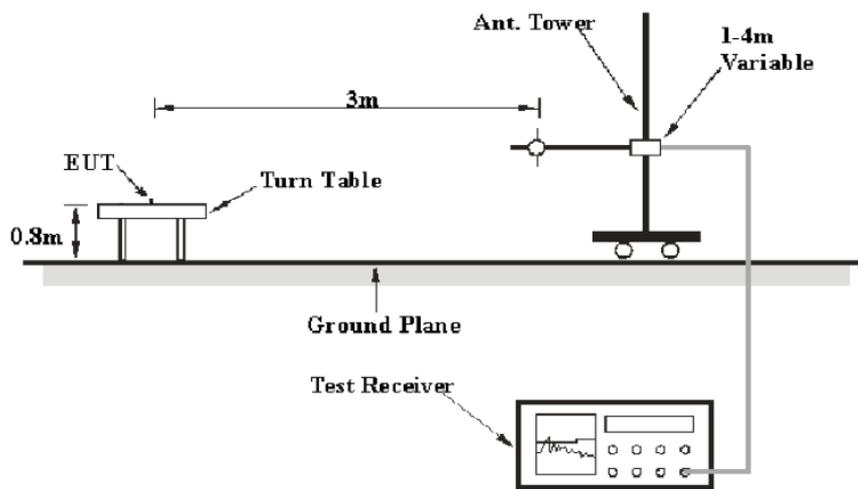

Above 1GHz:

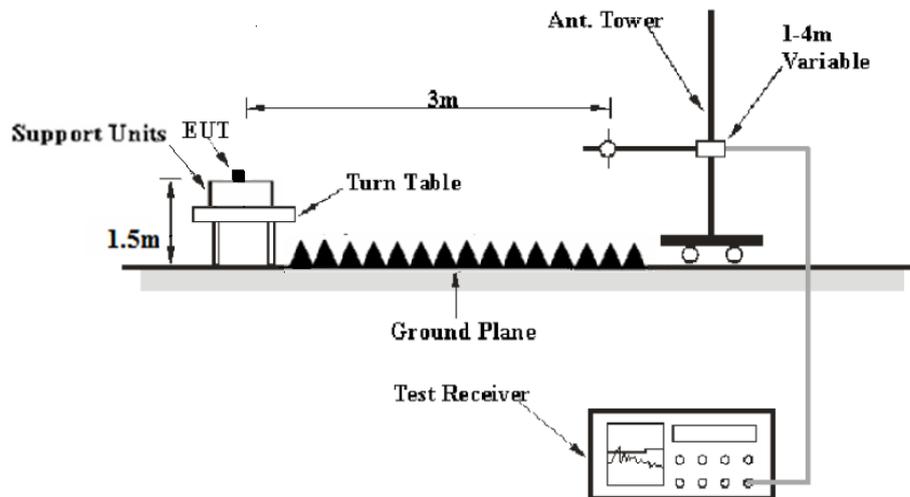

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave.

Test Procedure

According to ANSI C63.10-2013 clause 6.5, 6.6 and 6.7.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30MHz - 1GHz, peak and Average detection mode for frequencies above 1 GHz.

Corrected Factor & Over Limit Calculation (for below 1GHz)

The Corrected factor is calculated by adding Antenna Factor, Cable Loss and Amplifier Gain. The basic equation is as follows:

$$\text{Factor (dB)} = \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + \text{Amplifier Gain (dB)}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} - \text{Limit (dB}\mu\text{V)}$$

Corrected Amplitude & Margin Calculation (for above 1GHz)

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude (dB}\mu\text{V /m)} = \text{Meter Reading (dB}\mu\text{V)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Corrected Amplitude (dB}\mu\text{V/m)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data

Environmental Conditions


Temperature:	21.6~22.4 °C
Relative Humidity:	48~51 %
ATM Pressure:	101.2~102.3 kPa

The testing was performed by Jack Jiao from 2019-10-14 to 2019-10-18.

EUT operation mode: Transmitting

Spurious Emission Test:
Model: ESP32-S2-WROVER
30MHz-1GHz:
Horizontal


Pre-scan with 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case **High channel of 802.11n-HT20 mode in Z-axis of orientation** was recorded

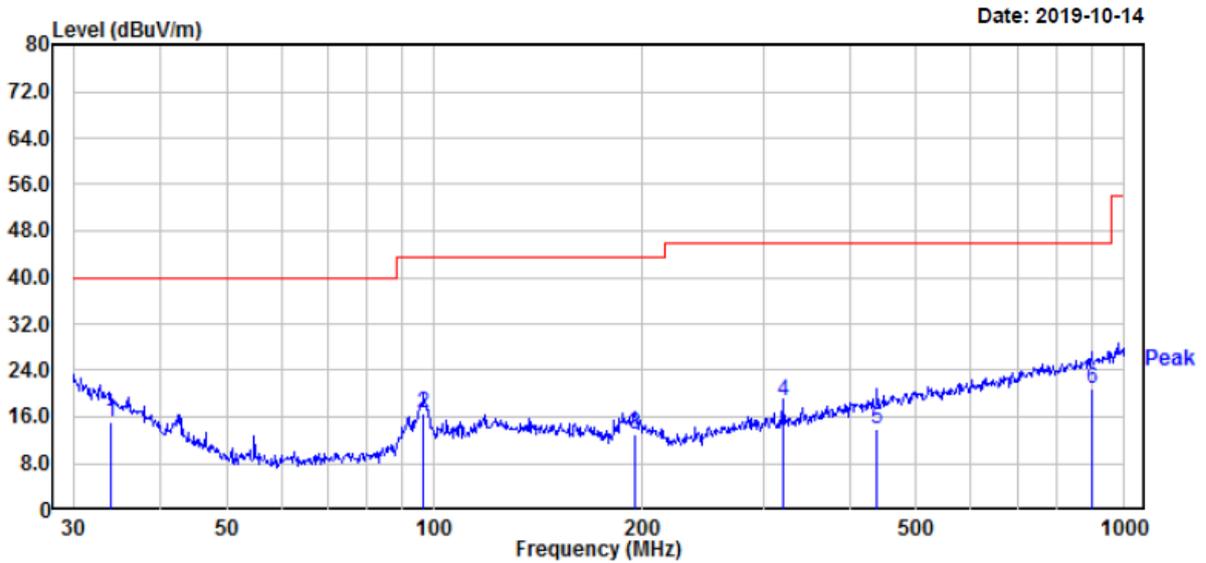

	Read Freq	Read Level	Factor	Limit Level	Over Limit	APos	TPos	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg
1	34.04	21.59	-6.48	15.11	40.00	-24.89	200	161 QP
2	96.44	32.20	-15.56	16.64	43.50	-26.86	200	161 QP
3	195.14	24.90	-11.95	12.95	43.50	-30.55	200	274 QP
4	319.94	28.70	-9.84	18.86	46.00	-27.14	100	19 QP
5	438.66	20.61	-6.85	13.76	46.00	-32.24	100	2 QP
6	897.00	19.91	0.97	20.88	46.00	-25.12	200	348 QP

Vertical

Pre-scan with 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case **High channel of 802.11n-HT20 in Z-axis of orientation** was recorded

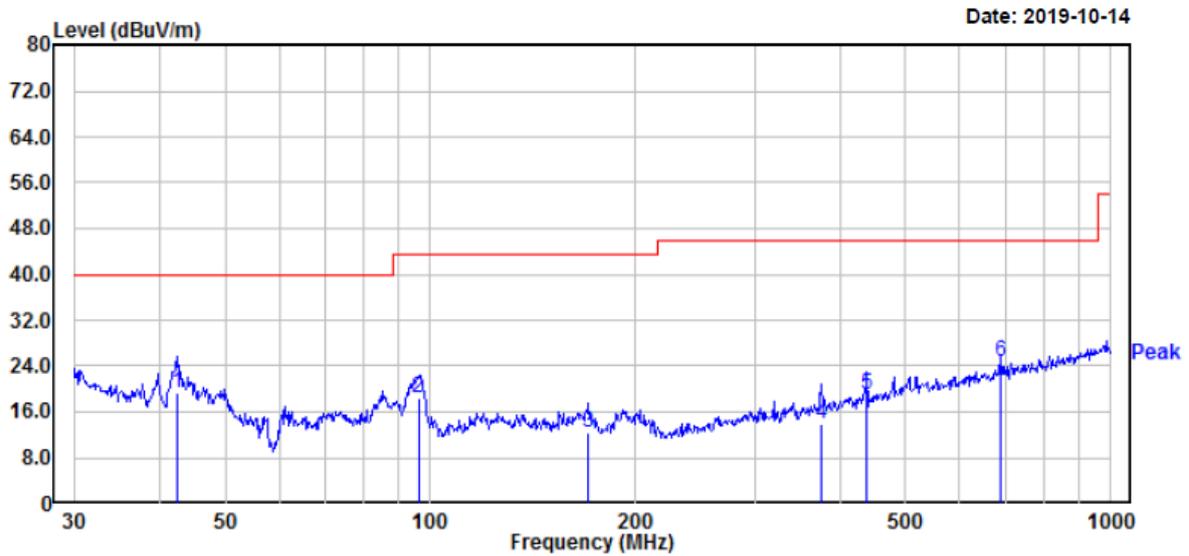

	Read Freq	Read Level	Factor	Limit Level	Over Limit	APos	TPos	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg
1	42.60	32.30	-12.87	19.43	40.00	-20.57	100	1 QP
2	96.10	34.00	-15.65	18.35	43.50	-25.15	100	122 QP
3	170.79	24.90	-12.57	12.33	43.50	-31.17	100	299 QP
4	375.94	22.19	-8.35	13.84	46.00	-32.16	100	268 QP
5	438.66	25.91	-6.85	19.06	46.00	-26.94	100	287 QP
6	689.57	27.10	-2.28	24.82	46.00	-21.18	100	313 QP

Note:

- 1) Factor (dB) = Antenna Factor (dB/m) + Cable Loss (dB) + Amplifier Gain (dB)
- 2) Over Limit (dB) = Read level (dBμV) + Factor (dB) - Limit (dBμV)

1GHz-18GHz:

802.11b Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)
 Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV/m)

Low Channel: 2412MHz


Full Spectrum

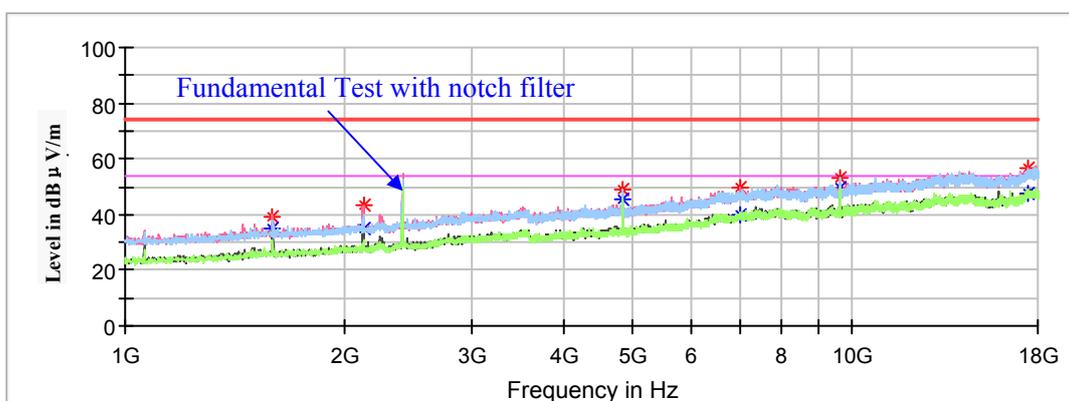

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1596.70	---	35.18	200	V	126	-9.6	54.00	18.82
1596.70	38.98	---	200	V	126	-9.6	74.00	35.02
2127.10	---	35.22	250	V	156	-7.9	54.00	18.78
2127.10	43.22	---	250	V	156	-7.9	74.00	30.78
4824.00	---	45.31	150	H	129	-0.5	54.00	8.69
4824.00	49.14	---	150	H	129	-0.5	74.00	24.86
7024.80	---	39.56	200	V	302	5.4	54.00	14.44
7024.80	49.71	---	200	V	302	5.4	74.00	24.29
9647.90	---	49.37	150	H	112	7.8	54.00	4.63
9647.90	53.03	---	150	H	112	7.8	74.00	20.97
17457.70	---	47.49	250	V	229	14.1	54.00	6.51
17457.70	56.71	---	250	V	229	14.1	74.00	17.29

Middle Channel: 2437MHz


Full Spectrum

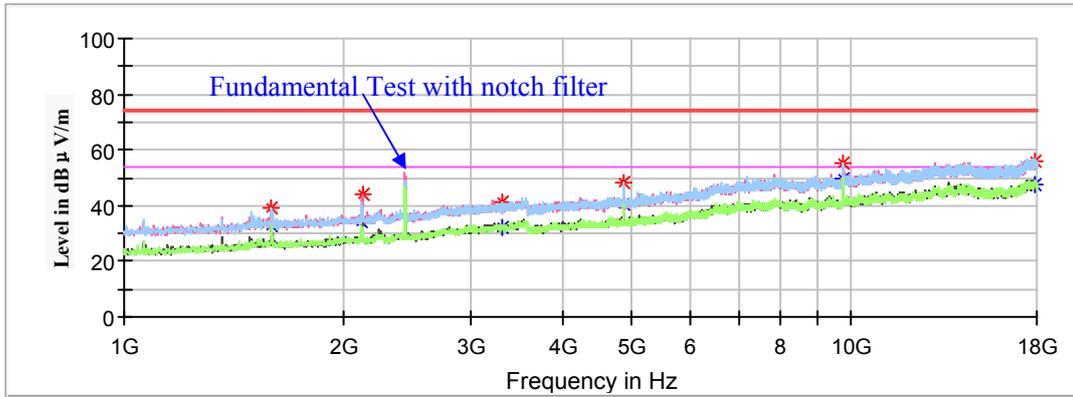

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1596.70	---	32.98	250	H	55	-9.6	54.00	21.02
1596.70	38.89	---	250	H	55	-9.6	74.00	35.11
2123.70	---	34.50	200	V	139	-7.9	54.00	19.50
2125.40	43.80	---	200	V	139	-7.9	74.00	30.20
3318.80	---	32.04	150	H	189	-3.8	54.00	21.96
3318.80	41.10	---	150	H	189	-3.8	74.00	32.90
4874.00	---	40.53	100	H	133	-0.5	54.00	13.47
4874.00	48.16	---	100	H	133	-0.5	74.00	25.84
9748.20	---	49.62	100	H	32	7.9	54.00	4.38
9748.20	55.36	---	100	H	32	7.9	74.00	18.64
17882.70	---	47.41	200	V	38	13.7	54.00	6.59
17882.70	56.09	---	200	V	38	13.7	74.00	17.91

High Channel: 2462MHz

Full Spectrum

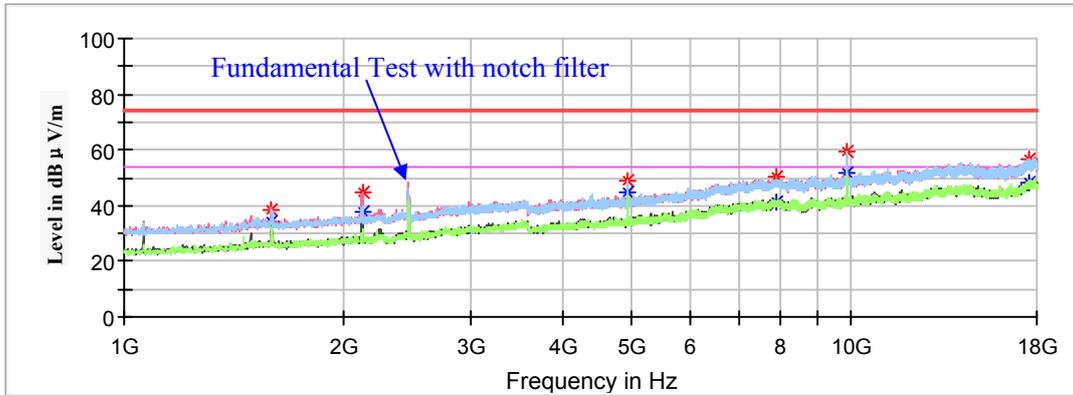

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1596.70	---	34.05	250	V	122	-9.6	54.00	19.95
1596.70	38.33	---	250	V	122	-9.6	74.00	35.67
2130.50	---	37.96	250	V	152	-7.9	54.00	16.04
2130.50	45.04	---	250	V	152	-7.9	74.00	28.96
4924.00	---	44.77	200	H	184	-0.4	54.00	9.23
4924.00	49.15	---	200	H	184	-0.4	74.00	24.85
7902.00	---	41.02	150	V	229	6.9	54.00	12.98
7902.00	50.30	---	150	V	229	6.9	74.00	23.70
9848.50	---	51.87	100	H	127	8.0	54.00	2.13
9848.50	59.67	---	100	H	127	8.0	74.00	14.33
17541.00	---	48.35	100	V	9	14.2	54.00	5.65
17541.00	56.90	---	100	V	9	14.2	74.00	17.10

802.11g Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBµV/m) = Corrected Factor (dB/m) + Reading (dBµV)
 Margin (dB) = Limit (dBµV/m) – Corrected Amplitude (dBµV/m)

Low Channel: 2412MHz


Full Spectrum

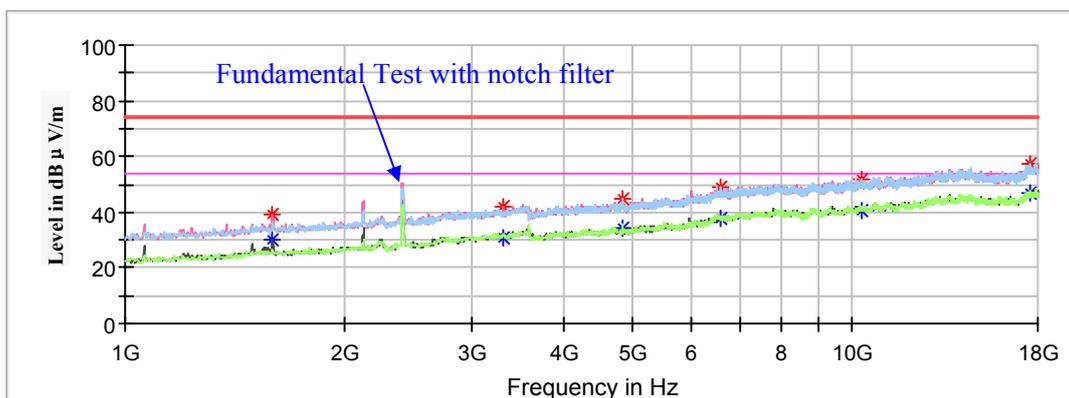

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1595.00	---	30.40	250	V	298	-9.6	54.00	23.60
1595.00	39.19	---	250	V	298	-9.6	74.00	34.81
3315.40	---	30.72	150	V	177	-3.9	54.00	23.28
3315.40	42.16	---	150	V	177	-3.9	74.00	31.84
4824.00	---	34.61	250	H	142	-0.5	54.00	19.39
4824.00	44.84	---	250	H	142	-0.5	74.00	29.16
6586.20	---	37.53	150	H	176	4.6	54.00	16.47
6586.20	48.95	---	150	H	176	4.6	74.00	25.05
10268.40	---	40.63	200	V	232	8.6	54.00	13.37
10268.40	51.55	---	200	V	232	8.6	74.00	22.45
17568.20	---	46.91	250	H	0	14.2	54.00	7.09
17568.20	57.57	---	250	H	0	14.2	74.00	16.43

Middle Channel: 2437MHz


Full Spectrum

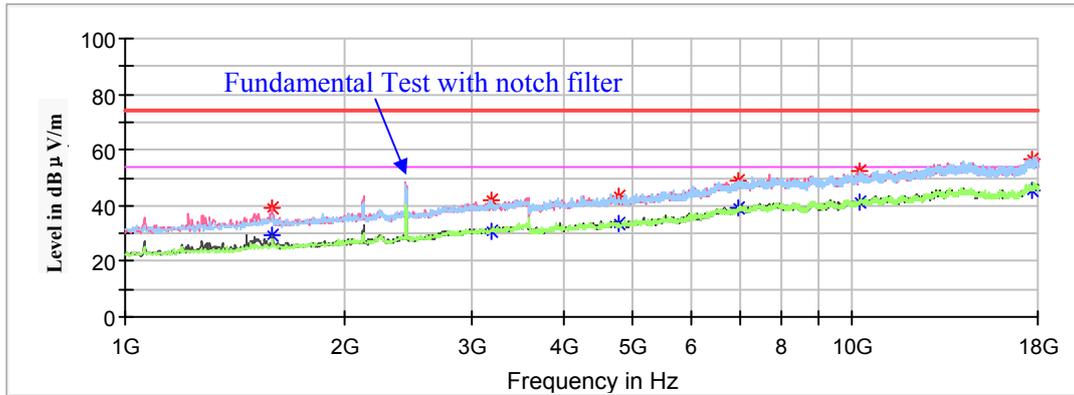

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1591.60	---	29.32	250	V	129	-9.6	54.00	24.68
1591.60	39.17	---	250	V	129	-9.6	74.00	34.83
3196.40	---	30.49	150	H	166	-4.1	54.00	23.51
3196.40	41.76	---	150	H	166	-4.1	74.00	32.24
4767.20	---	33.31	150	V	52	-0.6	54.00	20.69
4767.20	43.19	---	150	V	52	-0.6	74.00	30.81
6953.40	---	38.99	250	H	297	5.3	54.00	15.01
6953.40	49.28	---	250	H	297	5.3	74.00	24.72
10227.60	---	41.39	100	H	20	8.6	54.00	12.61
10227.60	52.39	---	100	H	20	8.6	74.00	21.61
17704.20	---	45.55	200	V	183	14.0	54.00	8.45
17704.20	56.99	---	200	V	183	14.0	74.00	17.01

High Channel: 2462MHz

Full Spectrum

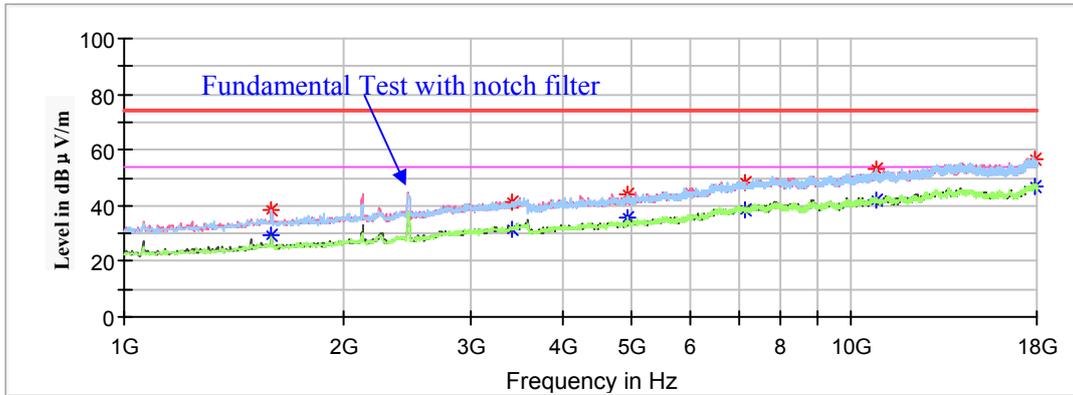

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1595.00	---	29.53	250	V	18	-9.6	54.00	24.47
1595.00	38.23	---	250	V	18	-9.6	74.00	35.77
3420.80	---	31.22	200	H	210	-3.7	54.00	22.78
3420.80	41.29	---	200	H	210	-3.7	74.00	32.71
4924.00	---	35.89	150	H	122	-0.4	54.00	18.11
4924.00	44.34	---	150	H	122	-0.4	74.00	29.66
7140.40	---	38.63	100	V	141	5.6	54.00	15.37
7140.40	48.35	---	100	V	141	5.6	74.00	25.65
10829.40	---	42.23	250	H	258	9.5	54.00	11.77
10829.40	53.35	---	250	H	258	9.5	74.00	20.65
17870.80	---	47.04	150	V	88	13.7	54.00	6.96
17870.80	56.68	---	150	V	88	13.7	74.00	17.32

802.11n-HT20 Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBµV/m) = Corrected Factor (dB/m) + Reading (dBµV)
 Margin (dB) = Limit (dBµV/m) – Corrected Amplitude (dBµV/m)

Low Channel : 2412MHz


Full Spectrum

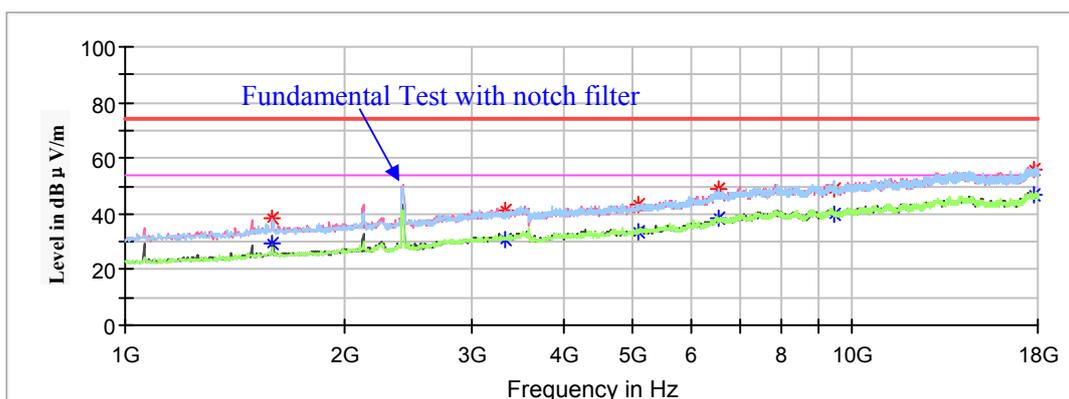

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1595.00	---	29.60	250	V	25	-9.6	54.00	24.40
1595.00	38.24	---	250	V	25	-9.6	74.00	35.76
3329.00	---	30.71	150	V	187	-3.8	54.00	23.29
3329.00	41.50	---	150	V	187	-3.8	74.00	32.50
5080.00	---	33.54	200	H	208	0	54.00	20.46
5080.00	43.51	---	200	H	208	0	74.00	30.49
6562.40	---	38.48	250	H	209	4.5	54.00	15.52
6562.40	48.70	---	250	H	209	4.5	74.00	25.30
9445.60	---	39.94	250	H	111	7.6	54.00	14.06
9445.60	49.17	---	250	H	111	7.6	74.00	24.83
17731.40	---	46.70	100	V	226	13.9	54.00	7.30
17731.40	56.16	---	100	V	226	13.9	74.00	17.84

Middle Channel: 2437MHz


Full Spectrum

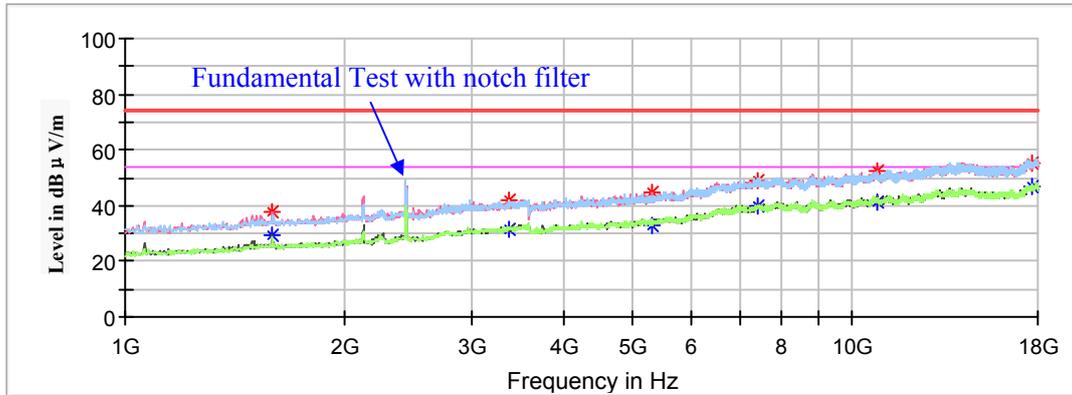

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1591.60	---	29.61	250	V	13	-9.6	54.00	24.39
1591.60	37.99	---	250	V	13	-9.6	74.00	36.01
3366.40	---	31.46	150	H	66	-3.8	54.00	22.54
3366.40	41.87	---	150	H	66	-3.8	74.00	32.13
5311.20	---	32.98	250	V	1	0.8	54.00	21.02
5311.20	44.49	---	250	V	1	0.8	74.00	29.51
7432.80	---	39.92	250	H	250	6.0	54.00	14.08
7432.80	48.98	---	250	H	250	6.0	74.00	25.02
10832.80	---	41.60	100	V	80	9.5	54.00	12.40
10832.80	52.49	---	100	V	80	9.5	74.00	21.51
17636.20	---	46.54	250	H	185	14.1	54.00	7.46
17636.20	55.56	---	250	H	185	14.1	74.00	18.44

High Channel : 2462MHz

Full Spectrum

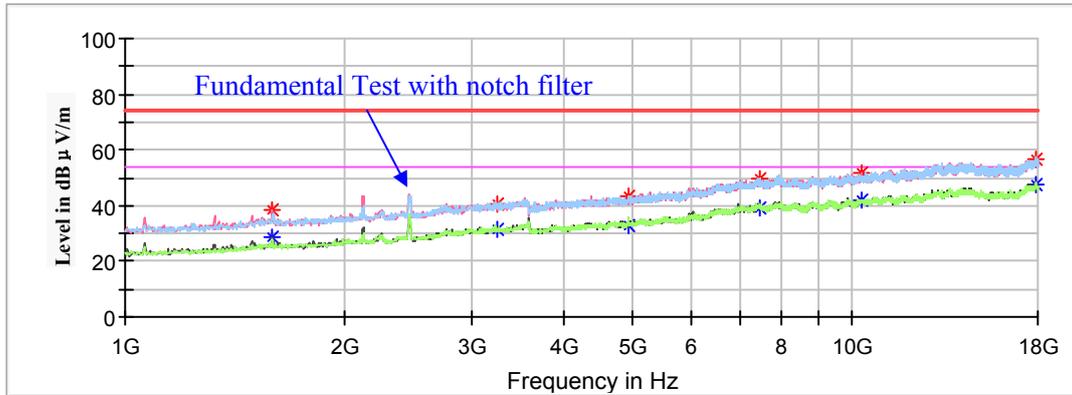

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1591.60	---	28.34	250	V	19	-9.6	54.00	25.66
1591.60	38.64	---	250	V	19	-9.6	74.00	35.36
3247.40	---	31.52	200	H	359	-4.0	54.00	22.48
3247.40	40.56	---	200	H	359	-4.0	74.00	33.44
4924.00	---	32.71	100	V	300	-0.4	54.00	21.29
4924.00	43.67	---	100	V	300	-0.4	74.00	30.33
7477.00	---	39.04	200	H	50	6.1	54.00	14.96
7477.00	49.36	---	200	H	50	6.1	74.00	24.64
10292.20	---	41.67	100	V	207	8.7	54.00	12.33
10292.20	51.89	---	100	V	207	8.7	74.00	22.11
17850.40	---	47.27	200	H	87	13.7	54.00	6.73
17850.40	56.83	---	200	H	87	13.7	74.00	17.17

802.11n-HT40 Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBµV/m) = Corrected Factor (dB/m) + Reading (dBµV)
 Margin (dB) = Limit (dBµV/m) – Corrected Amplitude (dBµV/m)

Low Channel : 2422MHz


Full Spectrum

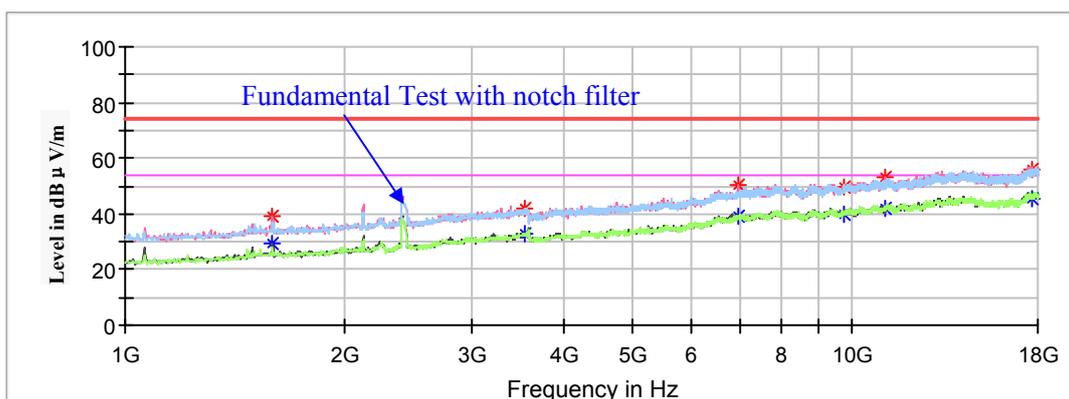

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1591.60	---	29.54	200	V	128	-9.6	54.00	24.46
1591.60	39.37	---	200	V	128	-9.6	74.00	34.63
3543.20	---	32.79	100	H	197	-3.4	54.00	21.21
3543.20	42.23	---	100	H	197	-3.4	74.00	31.77
6977.20	---	39.46	100	V	0	5.3	54.00	14.54
6977.20	50.03	---	100	V	0	5.3	74.00	23.97
9714.20	---	39.68	250	H	319	7.9	54.00	14.32
9714.20	49.70	---	250	H	319	7.9	74.00	24.30
11118.40	---	42.21	150	V	263	9.8	54.00	11.79
11118.40	52.97	---	150	V	263	9.8	74.00	21.03
17636.20	---	45.74	100	H	345	14.1	54.00	8.26
17636.20	55.99	---	100	H	345	14.1	74.00	18.01

Middle Channel: 2437MHz


Full Spectrum

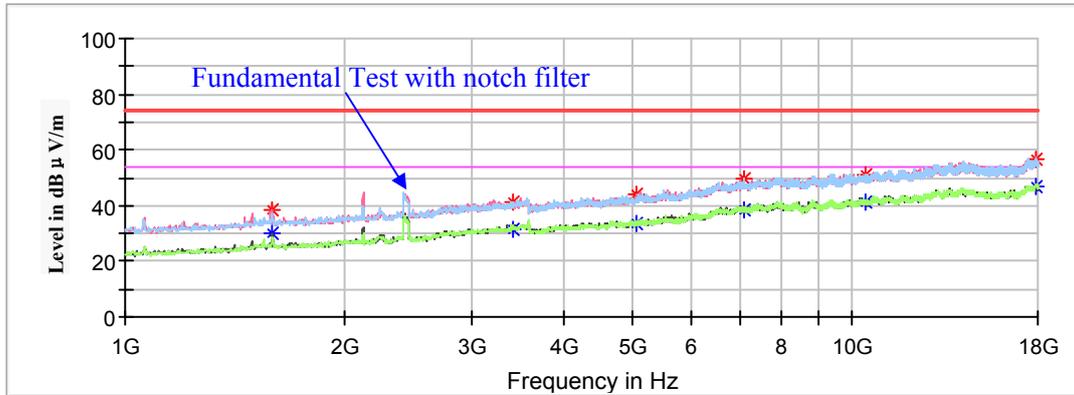

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1591.60	---	29.88	250	V	39	-9.6	54.00	24.12
1591.60	38.68	---	250	V	39	-9.6	74.00	35.32
3407.20	---	31.36	200	H	250	-3.7	54.00	22.64
3407.20	41.35	---	200	H	250	-3.7	74.00	32.65
5059.60	---	33.69	100	V	188	-0.1	54.00	20.31
5059.60	44.36	---	100	V	188	-0.1	74.00	29.64
7106.40	---	38.52	250	H	42	5.5	54.00	15.48
7106.40	49.81	---	250	H	42	5.5	74.00	24.19
10445.20	---	41.23	200	V	174	8.9	54.00	12.77
10445.20	51.08	---	200	V	174	8.9	74.00	22.92
17904.80	---	47.18	150	H	150	13.6	54.00	6.82
17904.80	56.48	---	150	H	150	13.6	74.00	17.52

High Channel : 2452MHz

Full Spectrum

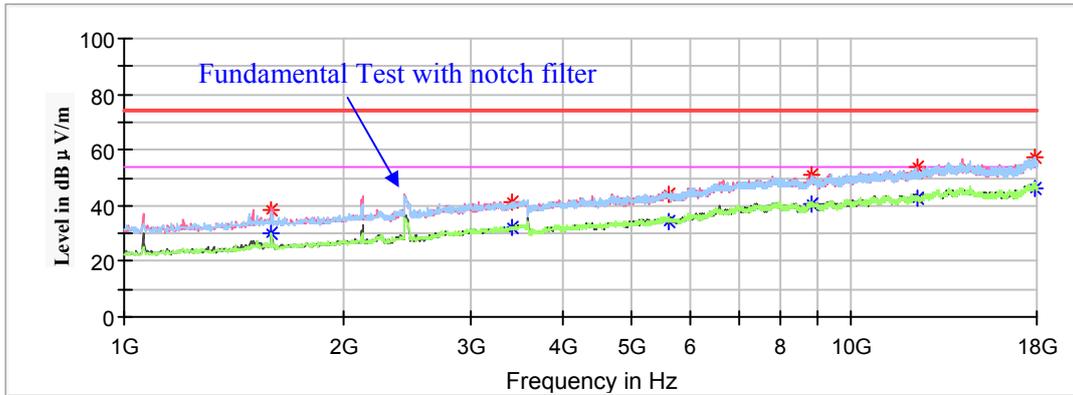


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1591.60	---	30.20	200	V	128	-9.6	54.00	23.80
1591.60	38.32	---	200	V	128	-9.6	74.00	35.68
3424.20	---	32.23	150	H	348	-3.7	54.00	21.77
3424.20	41.23	---	150	H	348	-3.7	74.00	32.77
5617.20	---	34.54	100	H	175	1.6	54.00	19.46
5617.20	44.29	---	100	H	175	1.6	74.00	29.71
8837.00	---	40.78	150	V	301	7.2	54.00	13.22
8837.00	50.97	---	150	V	301	7.2	74.00	23.03
12332.20	---	42.82	250	V	76	10.2	54.00	11.18
12332.20	53.59	---	250	V	76	10.2	74.00	20.41
17836.80	---	46.31	150	H	326	13.7	54.00	7.69
17836.80	57.62	---	150	H	326	13.7	74.00	16.38

18GHz-25GHz:


Pre-scan with 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case **High channel of 802.11n-HT20 mode in Z-axis of orientation** was recorded

Vertical

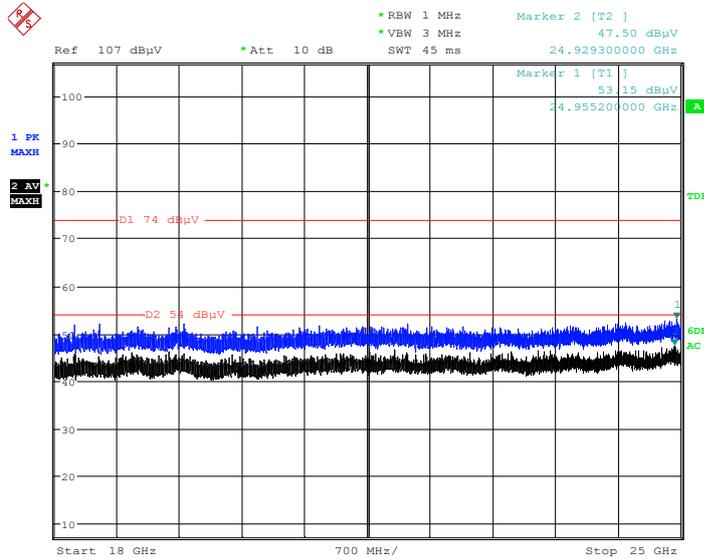

Date: 18.OCT.2019 11:20:35

Horizontal

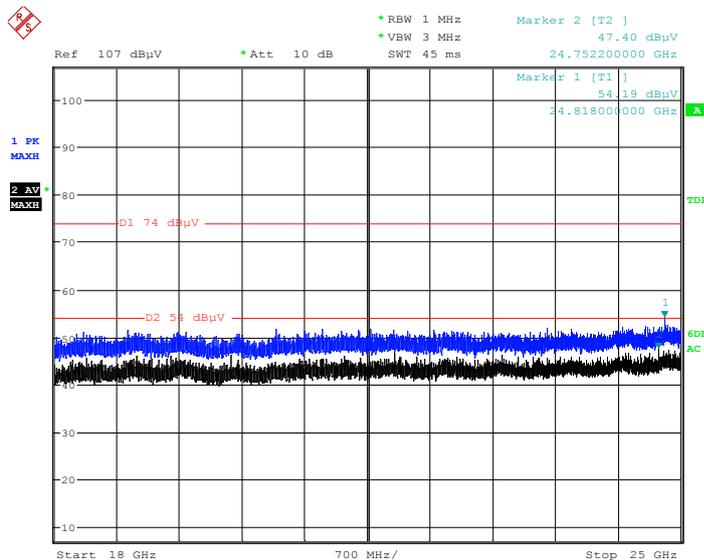

Date: 18.OCT.2019 11:35:21

Restricted Bands Emissions Test:

Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)


Corrected Amplitude (dBµV/m) = Corrected Factor (dB/m) + Reading (dBµV)

Margin (dB) = Limit (dBµV/m) – Corrected Amplitude (dBµV/m)

802.11b Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)


Left Side

Full Spectrum

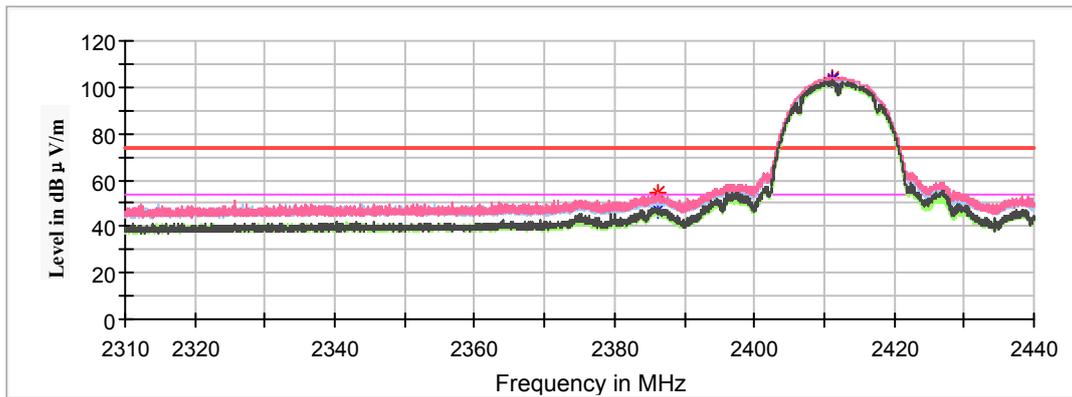

Right Side

Full Spectrum

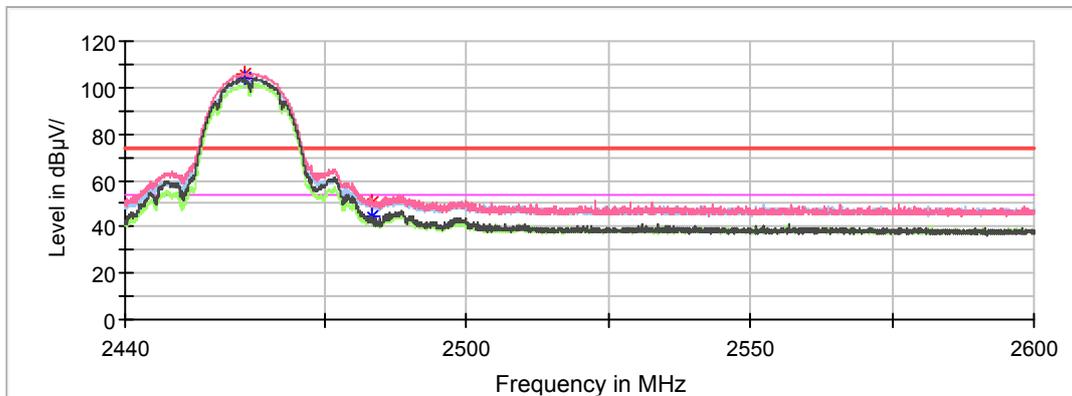


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2386.245	---	47.02	100.0	V	75.0	2.8	54.00	6.98
2386.245	54.16	---	100.0	V	75.0	2.8	74.00	19.84
High Channel: 2462MHz								
2491.616	---	47.20	150.0	V	79.0	3.0	54.00	6.80
2491.616	53.70	---	150.0	V	79.0	3.0	74.00	20.30

802.11g Mode: (Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)


Left Side

Full Spectrum

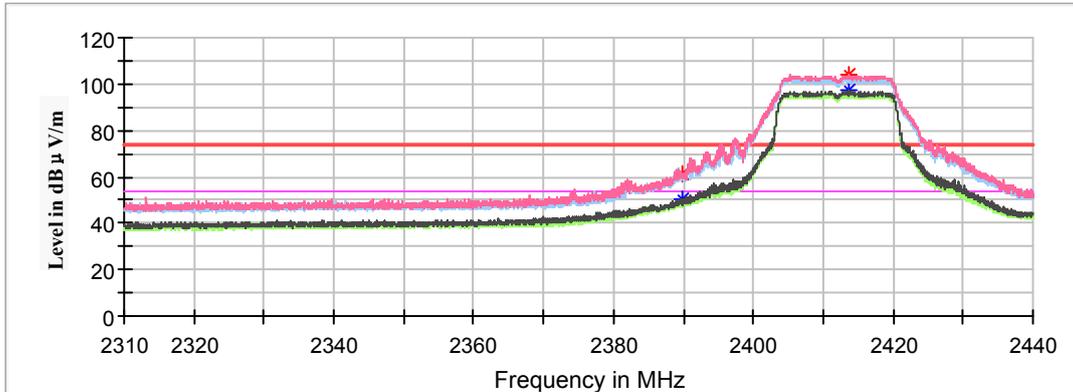

Right Side

Full Spectrum

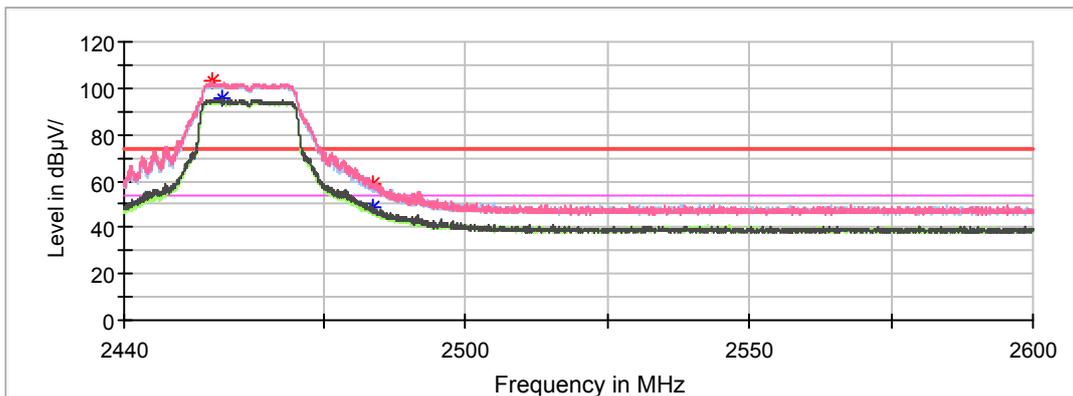


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2389.87	---	50.52	100.0	V	80.0	2.8	54.00	3.48
2389.87	61.25	---	100.0	V	80.0	2.8	74.00	12.75
High Channel: 2462MHz								
2483.68	---	48.94	150.0	V	111.0	3.0	54.00	5.06
2483.68	59.12	---	150.0	V	111.0	3.0	74.00	14.88

802.11n-HT20 Mode: (Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)


Left Side

Full Spectrum

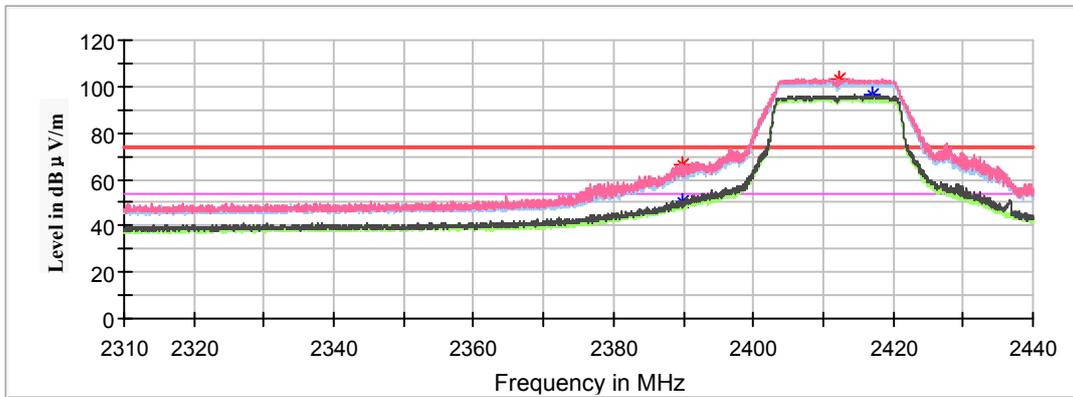

Right Side

Full Spectrum

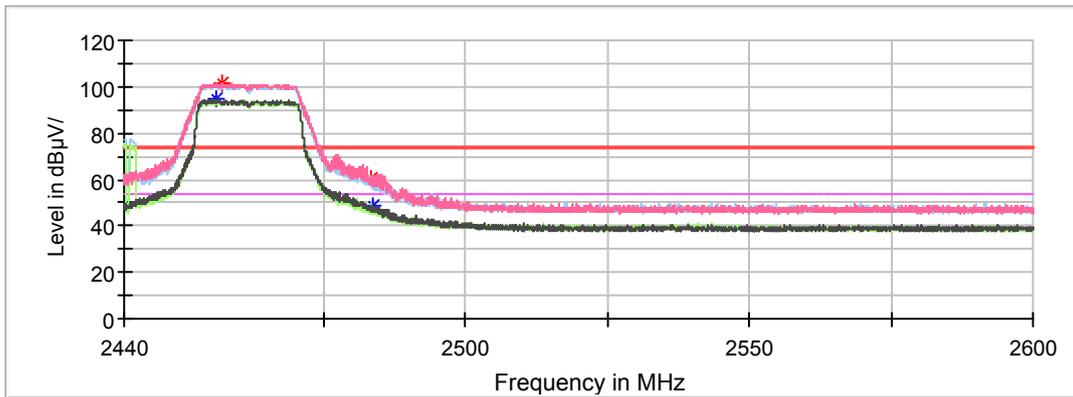


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2389.79	---	50.51	200.0	V	111.0	2.8	54.00	3.49
2389.79	66.28	---	200.0	V	111.0	2.8	74.00	7.72
High Channel: 2462MHz								
2483.62	---	49.06	100.0	V	100.0	3.0	54.00	4.94
2483.62	60.04	---	100.0	V	100.0	3.0	74.00	13.96

802.11n-HT40 Mode: (Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)


Left Side

Full Spectrum

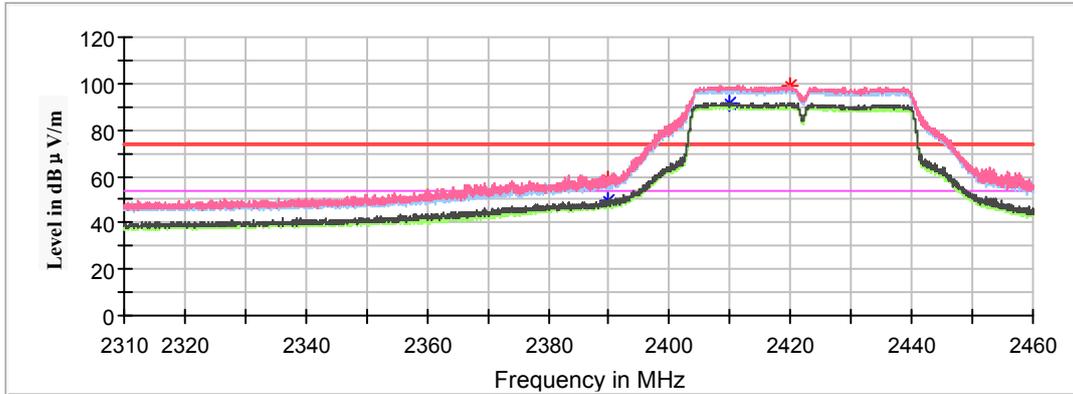

Right Side

Full Spectrum

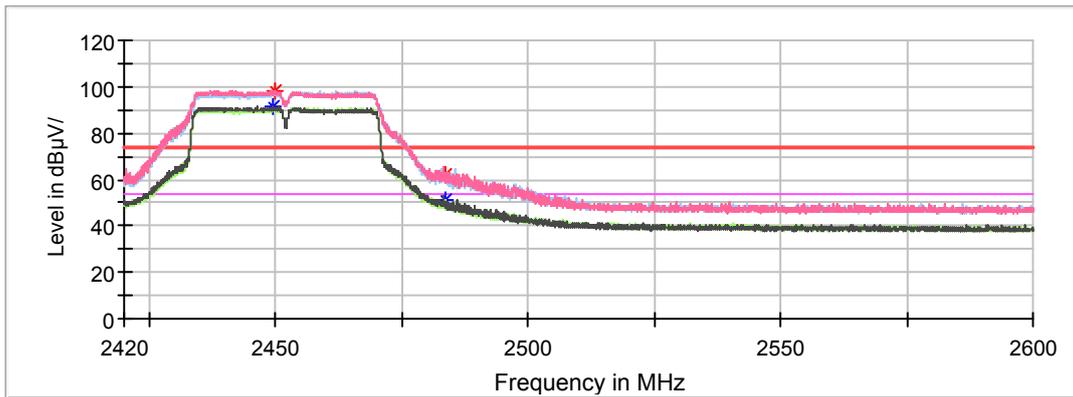

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2422MHz								
2389.92	---	49.29	200.0	V	69.0	2.8	54.00	4.71
2389.92	59.11	---	200.0	V	69.0	2.8	74.00	14.89
High Channel: 2452MHz								
2483.65	---	50.97	150.0	H	348.0	3.0	54.00	3.03
2483.65	62.25	---	150.0	H	348.0	3.0	74.00	11.75


Spurious Emission Test:

Model: ESP32-S2-WROVER-I

30MHz-1GHz:

Horizontal


Pre-scan with 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case **High channel of 802.11n-HT20 mode in Z-axis of orientation** was recorded

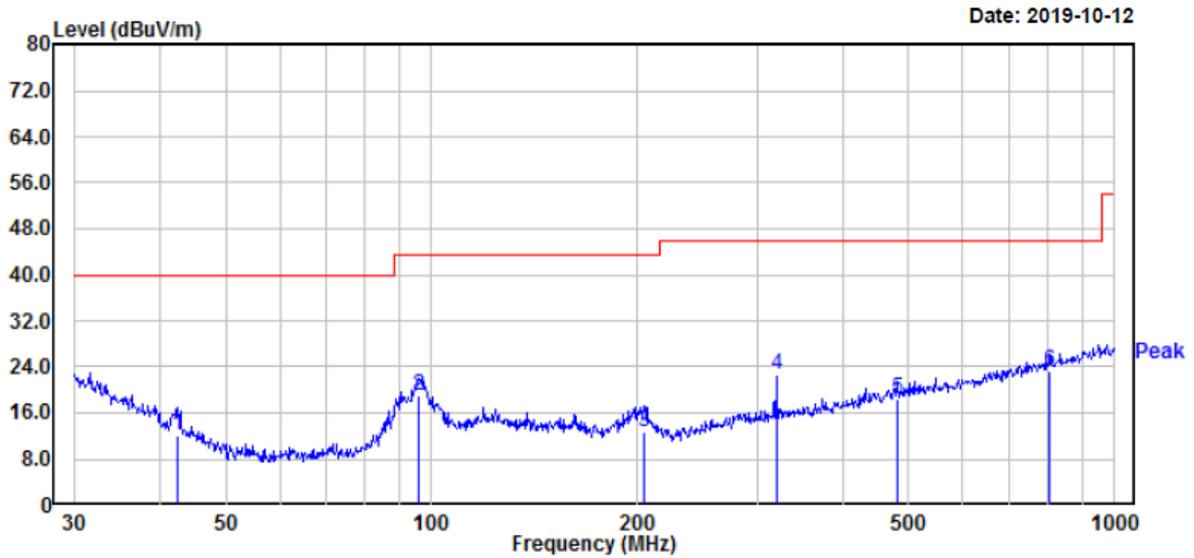

	Read Freq	Read Level	Read Factor	Limit Level	Over Limit	APos	TPos	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg
1	42.60	24.80	-12.87	11.93	40.00	-28.07	100	262 QP
2	95.76	34.91	-15.74	19.17	43.50	-24.33	200	0 QP
3	204.96	24.90	-12.08	12.82	43.50	-30.68	200	121 QP
4	319.94	32.50	-9.84	22.66	46.00	-23.34	100	291 QP
5	480.53	24.40	-5.93	18.47	46.00	-27.53	100	354 QP
6	804.60	23.90	-0.70	23.20	46.00	-22.80	100	304 QP

Vertical

Pre-scan with 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case **High channel of 802.11n-HT20 mode in Z-axis of orientation** was recorded

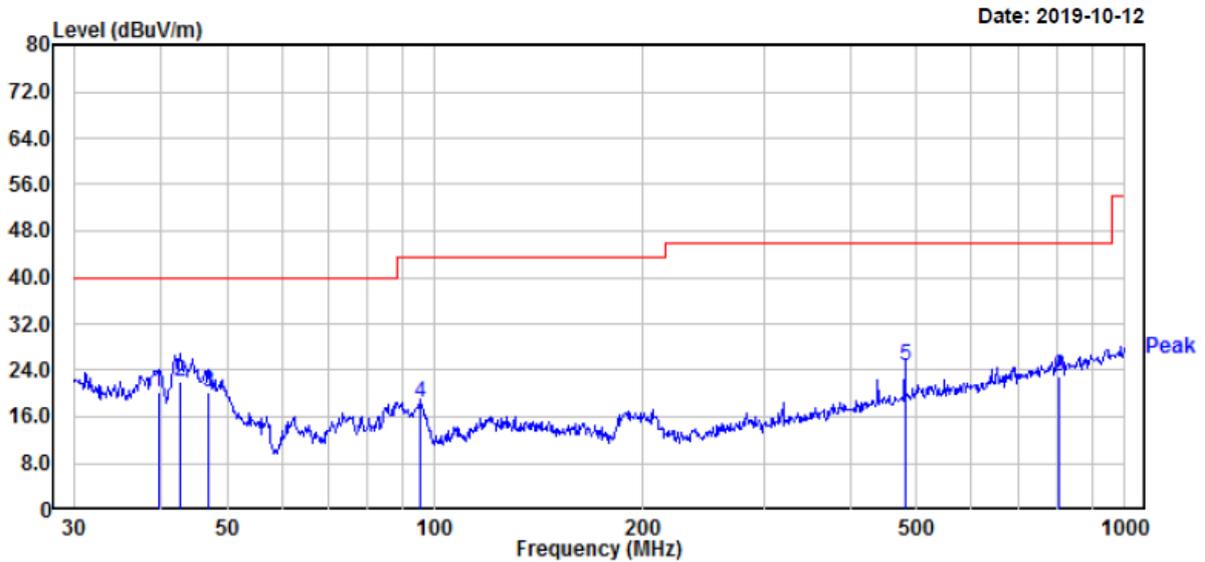

	Read Freq	Read Level	Factor	Limit Level	Over Limit	APos	TPos	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg
1	39.72	31.39	-11.20	20.19	40.00	-19.81	100	311 QP
2	42.75	34.99	-12.95	22.04	40.00	-17.96	100	239 QP
3	47.00	35.60	-15.29	20.31	40.00	-19.69	100	179 QP
4	95.43	34.11	-15.83	18.28	43.50	-25.22	100	299 QP
5	480.53	30.80	-5.93	24.87	46.00	-21.13	100	185 QP
6	804.60	23.50	-0.70	22.80	46.00	-23.20	100	287 QP

Note:

- 1) Factor (dB) = Antenna Factor (dB/m) + Cable Loss (dB) + Amplifier Gain (dB)
- 2) Over Limit (dB) = Read level (dBμV) + Factor (dB) - Limit (dBμV)

1GHz-18GHz:

802.11b Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBµV/m) = Corrected Factor (dB/m) + Reading (dBµV)
 Margin (dB) = Limit (dBµV/m) – Corrected Amplitude (dBµV/m)

Low Channel: 2412MHz


Full Spectrum

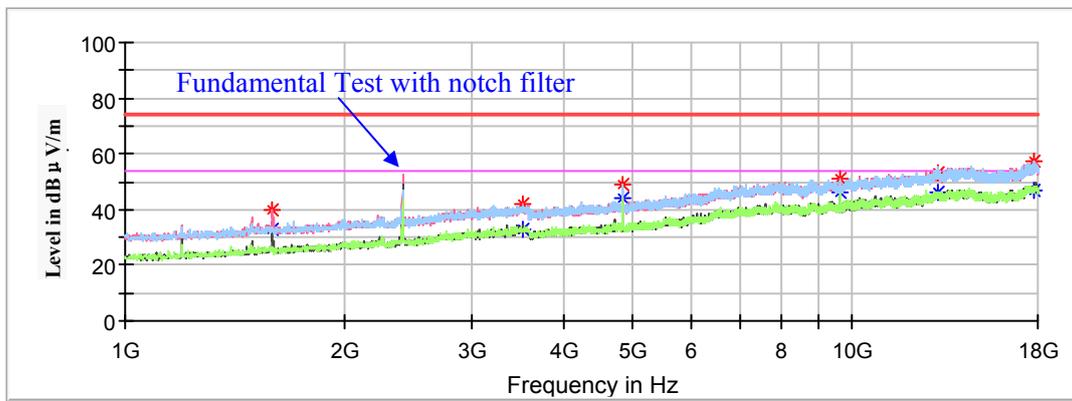

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1593.30	---	33.07	250	V	198	-9.6	54.00	20.93
1593.30	40.14	---	250	V	198	-9.6	74.00	33.86
3517.70	---	32.63	200	V	201	-3.5	54.00	21.37
3517.70	41.95	---	200	V	201	-3.5	74.00	32.05
4824.00	---	44.32	150	H	131	-0.5	54.00	9.68
4824.00	48.75	---	150	H	131	-0.5	74.00	25.25
9647.90	---	46.24	100	V	154	7.8	54.00	7.76
9647.90	51.07	---	100	V	154	7.8	74.00	22.93
13158.40	---	46.33	200	H	280	12.0	54.00	7.67
13158.40	53.10	---	200	H	280	12.0	74.00	20.90
17824.90	---	47.12	250	H	322	13.8	54.00	6.88
17824.90	57.31	---	250	H	322	13.8	74.00	16.69

Middle Channel: 2437MHz


Full Spectrum

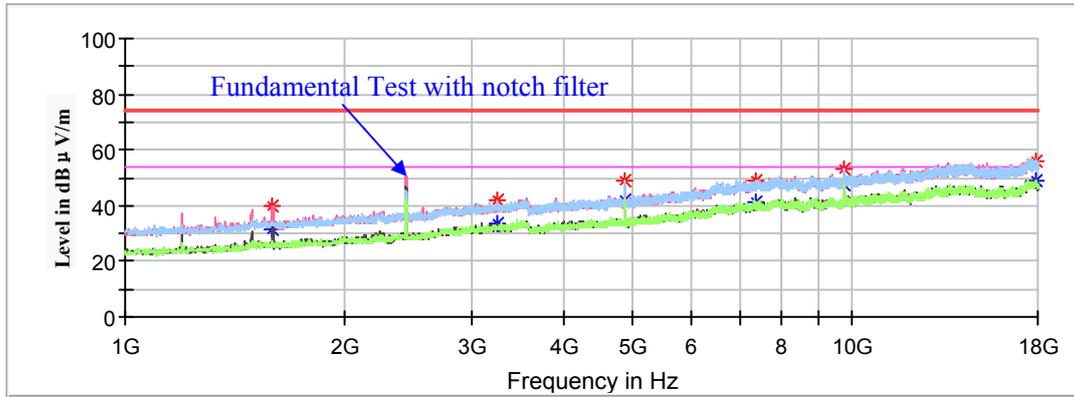

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1595.00	---	31.22	250	V	198	-9.6	54.00	22.78
1595.00	40.15	---	250	V	198	-9.6	74.00	33.85
3249.10	---	33.30	200	V	259	-4.0	54.00	20.70
3249.10	41.65	---	200	V	259	-4.0	74.00	32.35
4874.00	---	41.62	100	H	129	-0.5	54.00	12.38
4874.00	49.08	---	100	H	129	-0.5	74.00	24.92
7376.70	---	41.15	200	H	275	5.9	54.00	12.85
7376.70	49.01	---	200	H	275	5.9	74.00	24.99
9748.20	---	47.24	250	V	153	7.9	54.00	6.76
9748.20	53.49	---	250	V	153	7.9	74.00	20.51
17845.30	---	47.64	200	H	81	13.7	54.00	6.36
17845.30	56.22	---	200	H	81	13.7	74.00	17.78

High Channel: 2462MHz

Full Spectrum

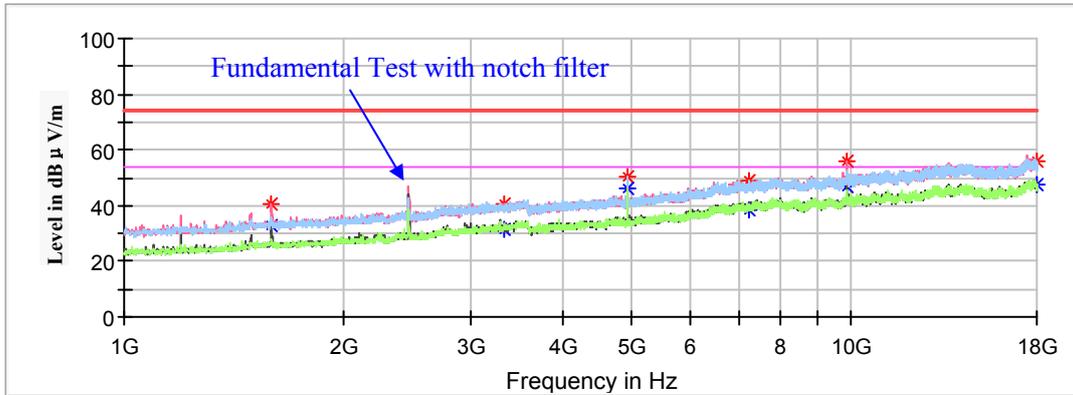

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1595.00	---	32.83	250	V	171	-9.6	54.00	21.17
1595.00	40.22	---	250	V	171	-9.6	74.00	33.78
3337.50	---	31.75	100	V	48	-3.8	54.00	22.25
3337.50	40.43	---	100	V	48	-3.8	74.00	33.57
4924.00	---	46.42	100	H	131	-0.4	54.00	7.58
4924.00	50.50	---	100	H	131	-0.4	74.00	23.50
7222.00	---	38.69	150	H	328	5.7	54.00	15.31
7222.00	48.68	---	150	H	328	5.7	74.00	25.32
9848.50	---	46.89	250	V	204	8.0	54.00	7.11
9848.50	56.11	---	250	V	204	8.0	74.00	17.89
17954.10	---	47.88	100	H	67	13.6	54.00	6.12
17954.10	56.09	---	100	H	67	13.6	74.00	17.91

802.11g Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)
 Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV/m)

Low Channel: 2412MHz


Full Spectrum

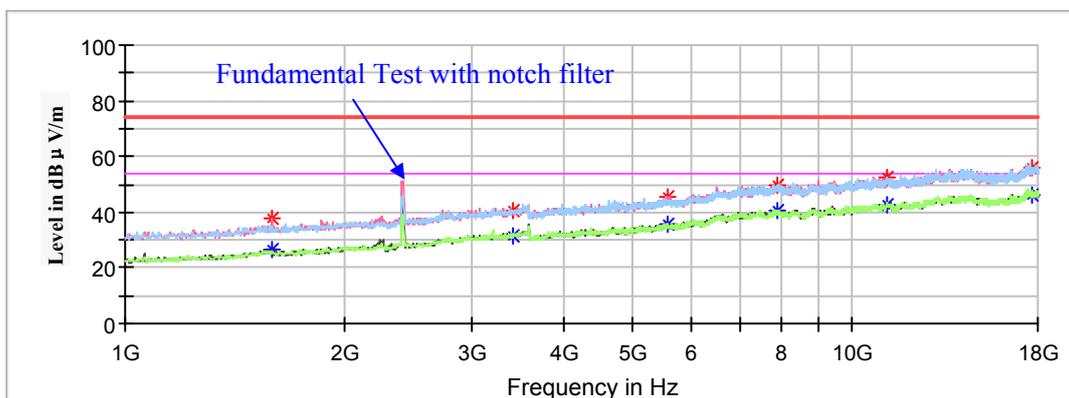

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1591.60	---	26.59	250	V	231	-9.6	54.00	27.41
1591.60	37.44	---	250	V	231	-9.6	74.00	36.56
3417.40	---	31.45	200	H	138	-3.7	54.00	22.55
3417.40	40.77	---	200	H	138	-3.7	74.00	33.23
5569.60	---	35.50	250	V	103	1.5	54.00	18.50
5569.60	45.29	---	250	V	103	1.5	74.00	28.71
7885.00	---	40.37	150	H	191	6.8	54.00	13.63
7885.00	49.41	---	150	H	191	6.8	74.00	24.59
11142.20	---	42.91	200	V	185	9.8	54.00	11.09
11142.20	52.59	---	200	V	185	9.8	74.00	21.41
17666.80	---	46.22	250	H	14	14.0	54.00	7.78
17666.80	56.11	---	250	H	14	14.0	74.00	17.89

Middle Channel: 2437MHz


Full Spectrum

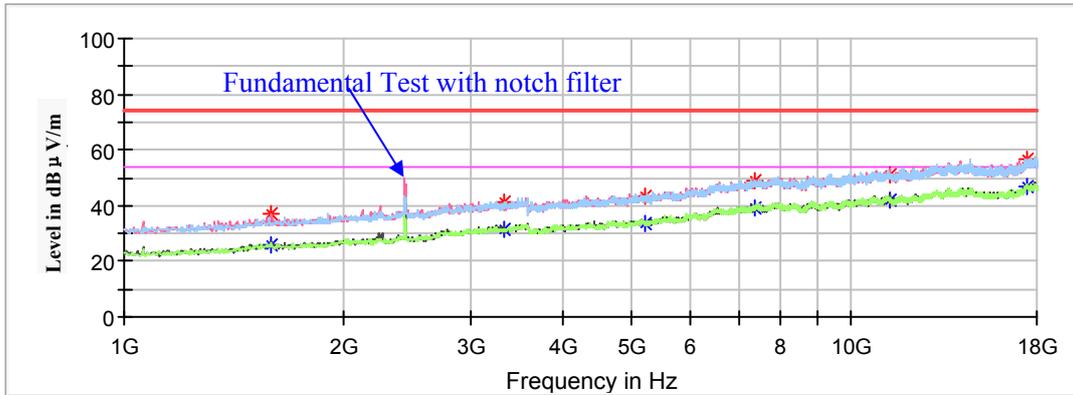

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1595.00	---	26.08	250	V	323	-9.6	54.00	27.92
1595.00	36.83	---	250	V	323	-9.6	74.00	37.17
3339.20	---	31.54	200	H	129	-3.8	54.00	22.46
3339.20	41.02	---	200	H	129	-3.8	74.00	32.98
5195.60	---	33.62	200	V	233	0.4	54.00	20.38
5195.60	43.32	---	200	V	233	0.4	74.00	30.68
7378.40	---	39.18	150	H	103	5.9	54.00	14.82
7378.40	49.23	---	150	H	103	5.9	74.00	24.77
11271.40	---	42.28	100	H	264	9.8	54.00	11.72
11271.40	51.27	---	100	H	264	9.8	74.00	22.73
17473.00	---	47.01	150	V	296	14.1	54.00	6.99
17473.00	56.84	---	150	V	296	14.1	74.00	17.16

High Channel: 2462MHz

Full Spectrum

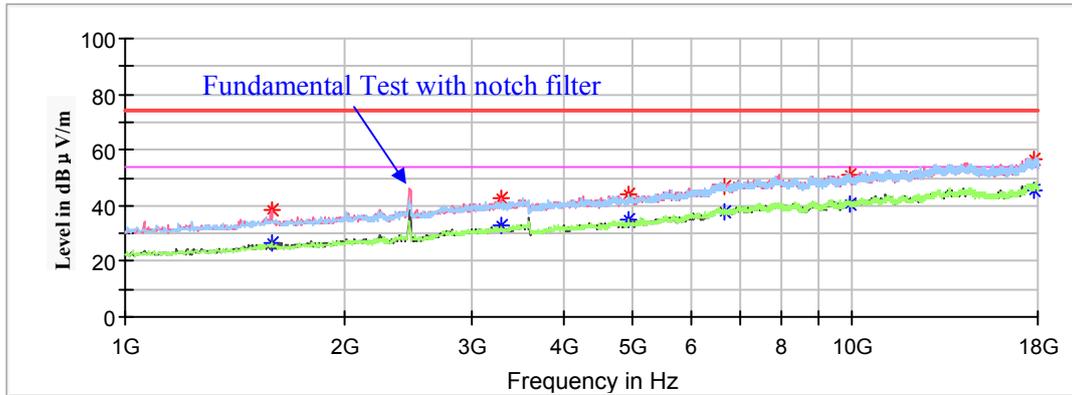

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1588.20	---	26.66	250	V	295	-9.6	54.00	27.34
1588.20	38.43	---	250	V	295	-9.6	74.00	35.57
3281.40	---	32.72	200	V	247	-3.9	54.00	21.28
3281.40	42.67	---	200	V	247	-3.9	74.00	31.33
4924.00	---	34.90	150	H	146	-0.4	54.00	19.10
4924.00	44.15	---	150	H	146	-0.4	74.00	29.85
6654.20	---	37.80	200	H	105	4.7	54.00	16.20
6654.20	46.77	---	200	H	105	4.7	74.00	27.23
9928.40	---	40.68	100	H	158	8.1	54.00	13.32
9928.40	51.25	---	100	H	158	8.1	74.00	22.75
17748.40	---	45.56	150	V	19	13.9	54.00	8.44
17748.40	56.33	---	150	V	19	13.9	74.00	17.67

802.11n-HT20 Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBµV/m) = Corrected Factor (dB/m) + Reading (dBµV)
 Margin (dB) = Limit (dBµV/m) – Corrected Amplitude (dBµV/m)

Low Channel : 2412MHz


Full Spectrum

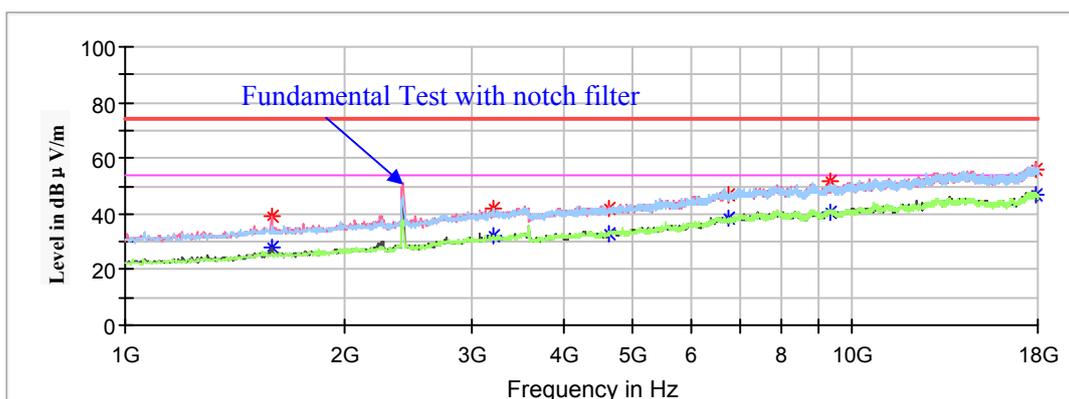

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1588.20	---	27.93	200	V	262	-9.6	54.00	26.07
1588.20	39.23	---	200	V	262	-9.6	74.00	34.77
3213.40	---	32.16	250	H	245	-4.0	54.00	21.84
3213.40	42.23	---	250	H	245	-4.0	74.00	31.77
4631.20	---	32.78	150	V	80	-0.8	54.00	21.22
4631.20	42.24	---	150	V	80	-0.8	74.00	31.76
6763.00	---	38.13	200	H	2	4.9	54.00	15.87
6763.00	47.03	---	200	H	2	4.9	74.00	26.97
9326.60	---	40.43	250	V	193	7.7	54.00	13.57
9326.60	51.50	---	250	V	193	7.7	74.00	22.50
17860.60	---	46.51	200	H	16	13.7	54.00	7.49
17860.60	56.07	---	200	H	16	13.7	74.00	17.93

Middle Channel: 2437MHz


Full Spectrum

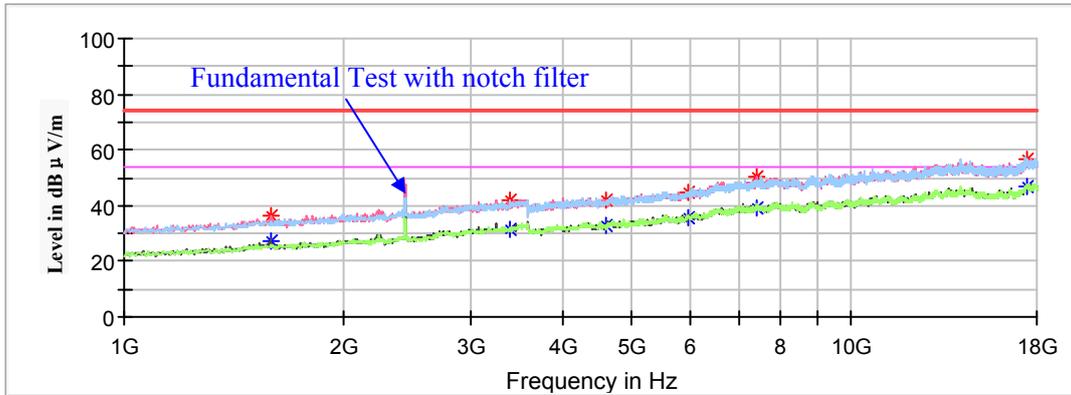

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1591.60	---	27.52	150	V	234	-9.6	54.00	26.48
1591.60	36.33	---	150	V	234	-9.6	74.00	37.67
3400.40	---	31.23	250	H	298	-3.7	54.00	22.77
3400.40	42.05	---	250	H	298	-3.7	74.00	31.95
4593.80	---	32.73	250	V	186	-0.8	54.00	21.27
4593.80	42.07	---	250	V	186	-0.8	74.00	31.93
5950.40	---	35.46	100	H	192	2.2	54.00	18.54
5950.40	44.89	---	100	H	192	2.2	74.00	29.11
7409.00	---	39.32	150	V	222	6.0	54.00	14.68
7409.00	50.68	---	150	V	222	6.0	74.00	23.32
17422.00	---	46.51	100	H	132	13.9	54.00	7.49
17422.00	56.85	---	100	H	132	13.9	74.00	17.15

High Channel : 2462MHz

Full Spectrum

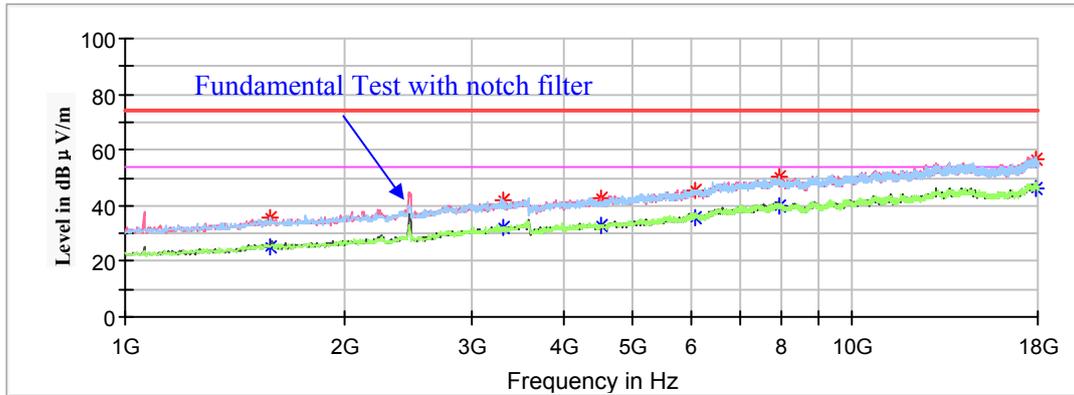

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1581.40	---	25.06	200	H	193	-9.7	54.00	28.94
1581.40	35.66	---	200	H	193	-9.7	74.00	38.34
3305.20	---	32.15	100	H	346	-3.9	54.00	21.85
3305.20	41.70	---	100	H	346	-3.9	74.00	32.30
4519.00	---	32.69	150	V	4	-1.0	54.00	21.31
4519.00	42.71	---	150	V	4	-1.0	74.00	31.29
6066.00	---	35.97	100	V	114	2.6	54.00	18.03
6066.00	45.45	---	100	V	114	2.6	74.00	28.55
7915.60	---	39.80	200	V	358	6.9	54.00	14.20
7915.60	50.48	---	200	V	358	6.9	74.00	23.52
17870.80	---	46.38	150	H	246	13.7	54.00	7.62
17870.80	56.49	---	150	H	246	13.7	74.00	17.51

802.11n-HT40 Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBµV/m) = Corrected Factor (dB/m) + Reading (dBµV)
 Margin (dB) = Limit (dBµV/m) – Corrected Amplitude (dBµV/m)

Low Channel : 2422MHz


Full Spectrum

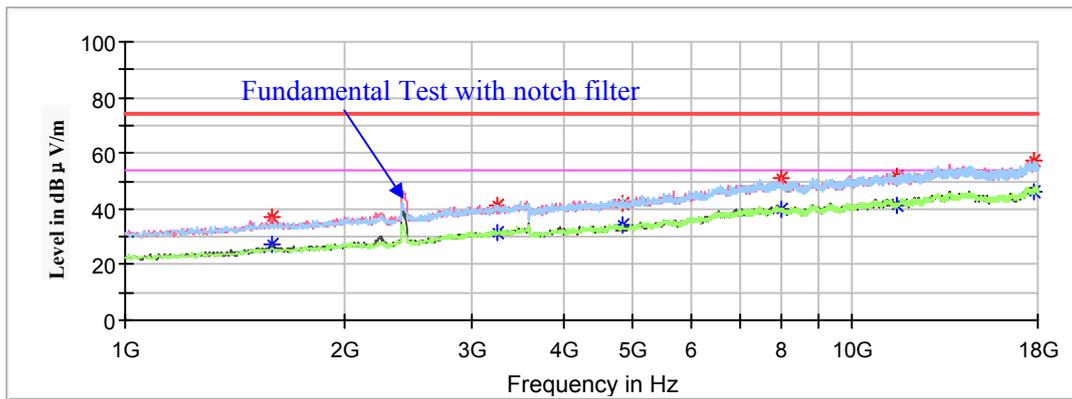

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1591.60	---	27.52	150	V	223	-9.6	54.00	26.48
1591.60	36.72	---	150	V	223	-9.6	74.00	37.28
3240.60	---	31.76	100	H	33	-4.0	54.00	22.24
3240.60	41.16	---	100	H	33	-4.0	74.00	32.84
4844.00	---	34.37	150	H	115	-0.5	54.00	19.63
4844.00	42.13	---	150	H	115	-0.5	74.00	31.87
7997.20	---	39.62	200	V	224	7.1	54.00	14.38
7997.20	50.82	---	200	V	224	7.1	74.00	23.18
11492.40	---	41.19	150	H	186	9.8	54.00	12.81
11492.40	51.73	---	150	H	186	9.8	74.00	22.27
17745.00	---	46.06	200	V	258	13.9	54.00	7.94
17745.00	57.31	---	200	V	258	13.9	74.00	16.69

Middle Channel: 2437MHz


Full Spectrum

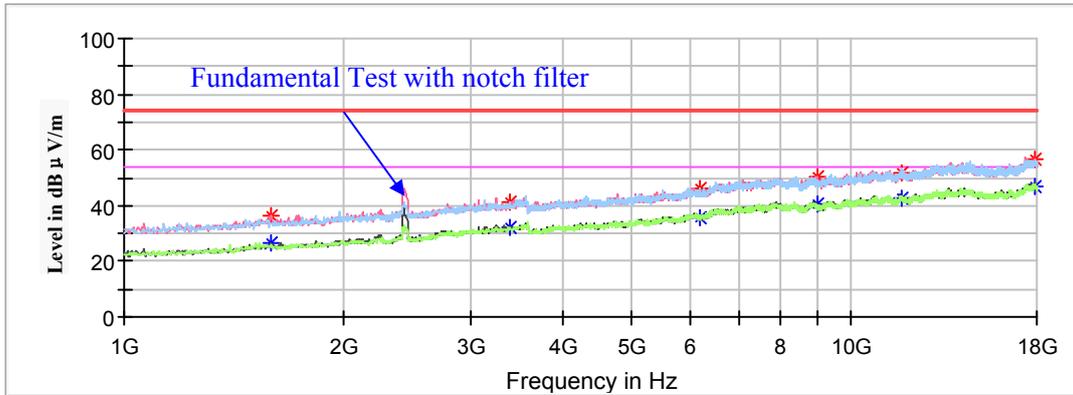

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1591.60	---	26.79	150	V	235	-9.6	54.00	27.21
1591.60	36.22	---	150	V	235	-9.6	74.00	37.78
3386.80	---	31.84	250	H	195	-3.7	54.00	22.16
3386.80	41.28	---	250	H	195	-3.7	74.00	32.72
6202.00	---	35.83	200	H	171	3.1	54.00	18.17
6202.00	46.47	---	200	H	171	3.1	74.00	27.53
8996.80	---	40.26	100	V	217	7.7	54.00	13.74
8996.80	50.33	---	100	V	217	7.7	74.00	23.67
11757.60	---	42.95	200	H	2	9.9	54.00	11.05
11757.60	51.75	---	200	H	2	9.9	74.00	22.25
17874.20	---	47.19	100	V	29	13.7	54.00	6.81
17874.20	56.77	---	100	V	29	13.7	74.00	17.23

High Channel : 2452MHz

Full Spectrum

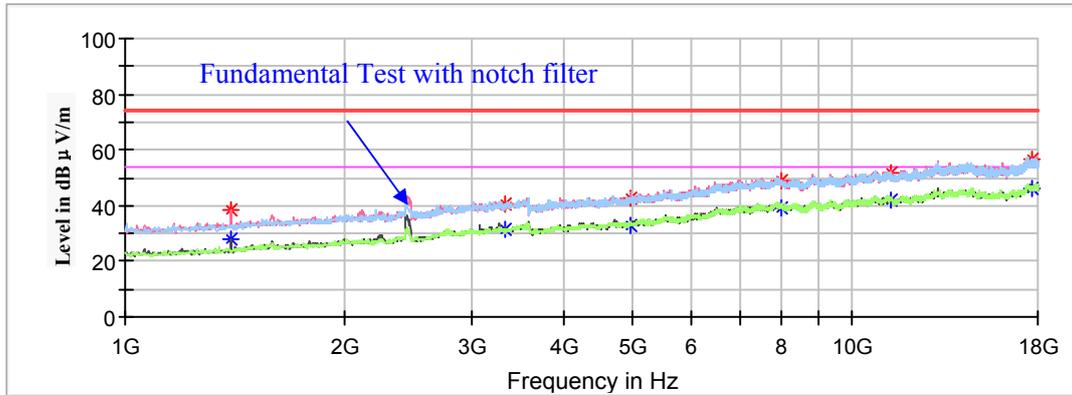


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1397.80	---	28.18	150	V	165	-10.5	54.00	25.82
1397.80	38.28	---	150	V	165	-10.5	74.00	35.72
3335.80	---	31.38	250	H	300	-3.8	54.00	22.62
3335.80	40.29	---	250	H	300	-3.8	74.00	33.71
4947.40	---	32.89	150	H	141	-0.4	54.00	21.11
4947.40	42.94	---	150	H	141	-0.4	74.00	31.06
7990.40	---	39.45	100	V	177	7.0	54.00	14.55
7990.40	48.94	---	100	V	177	7.0	74.00	25.06
11305.40	---	42.21	200	V	21	9.8	54.00	11.79
11305.40	52.09	---	200	V	21	9.8	74.00	21.91
17680.40	---	46.01	250	H	0	14.0	54.00	7.99
17680.40	56.94	---	250	H	0	14.0	74.00	17.06

18GHz-25GHz:


Pre-scan with 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case **High channel of 802.11n-HT20 mode in Z-axis of orientation** was recorded

Vertical

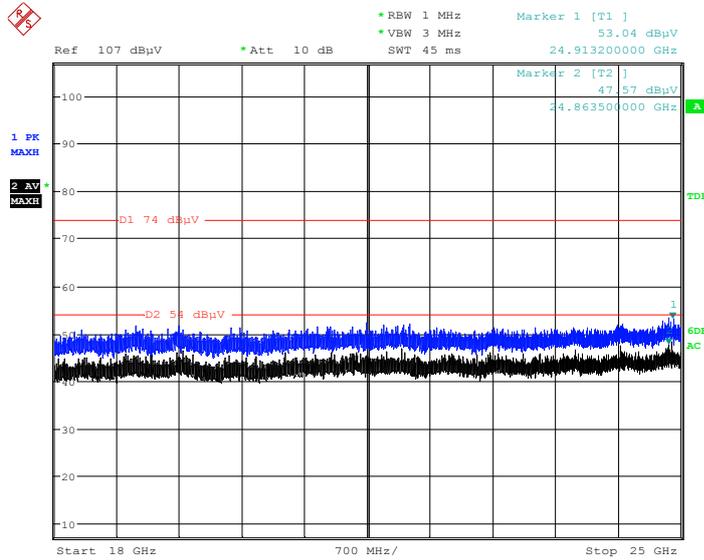

Date: 18.OCT.2019 11:56:24

Horizontal

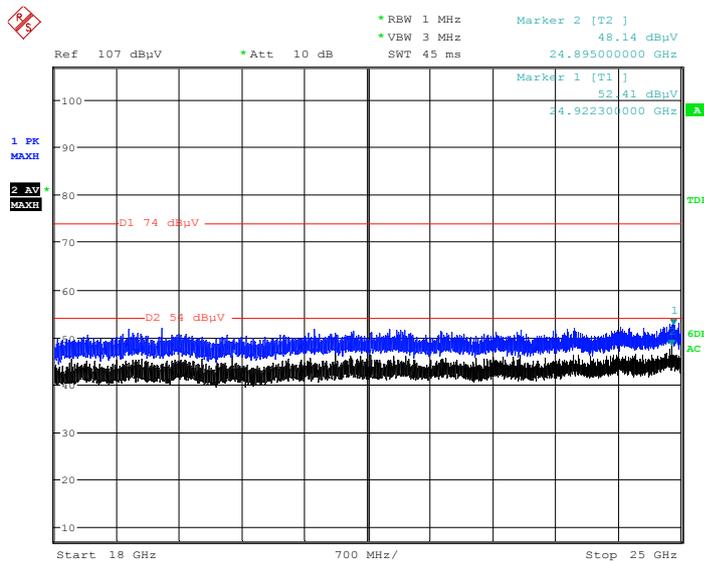

Date: 18.OCT.2019 12:20:49

Restricted Bands Emissions Test:

Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)


Corrected Amplitude (dBµV/m) = Corrected Factor (dB/m) + Reading (dBµV)

Margin (dB) = Limit (dBµV/m) – Corrected Amplitude (dBµV/m)

802.11b Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)


Left Side

Full Spectrum

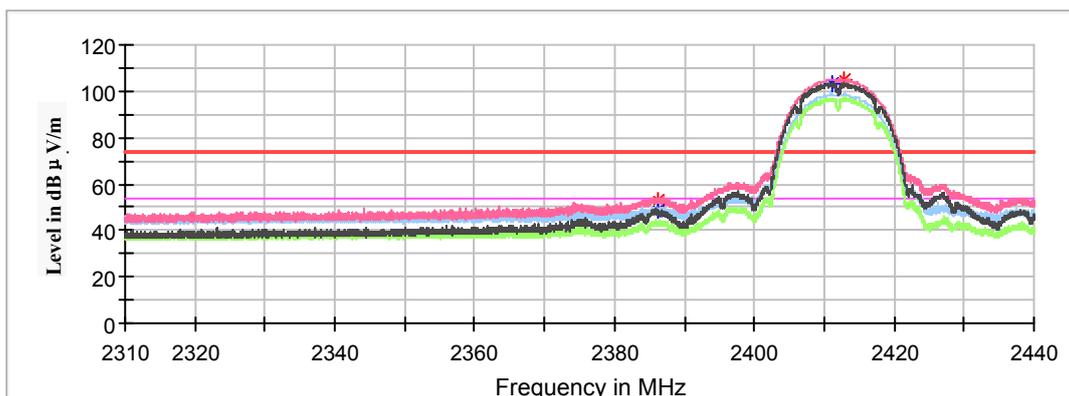

Right Side

Full Spectrum

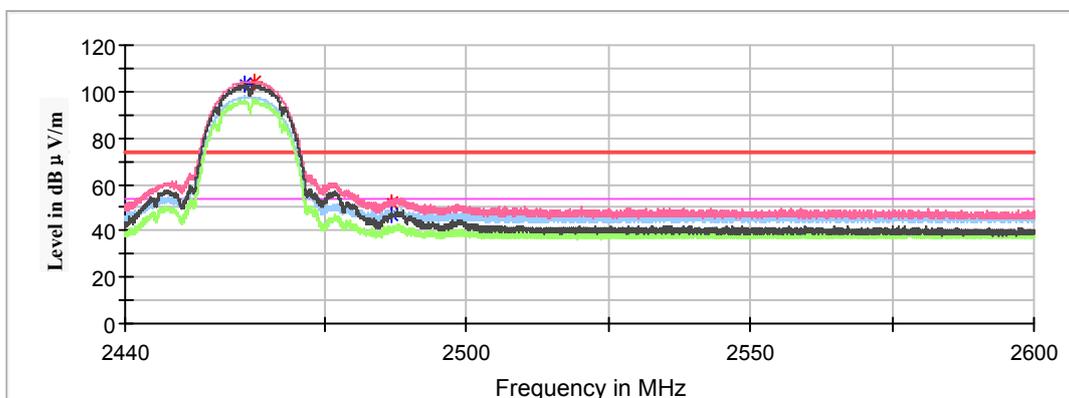


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2386.14	---	48.92	150.0	V	80.0	2.8	54.00	5.08
2386.14	52.74	---	150.0	V	80.0	2.8	74.00	21.26
High Channel: 2462MHz								
2486.82	---	48.30	100.0	V	49.0	3.0	54.00	5.70
2486.82	53.21	---	100.0	V	49.0	3.0	74.00	20.79

802.11g Mode: (Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)


Left Side

Full Spectrum

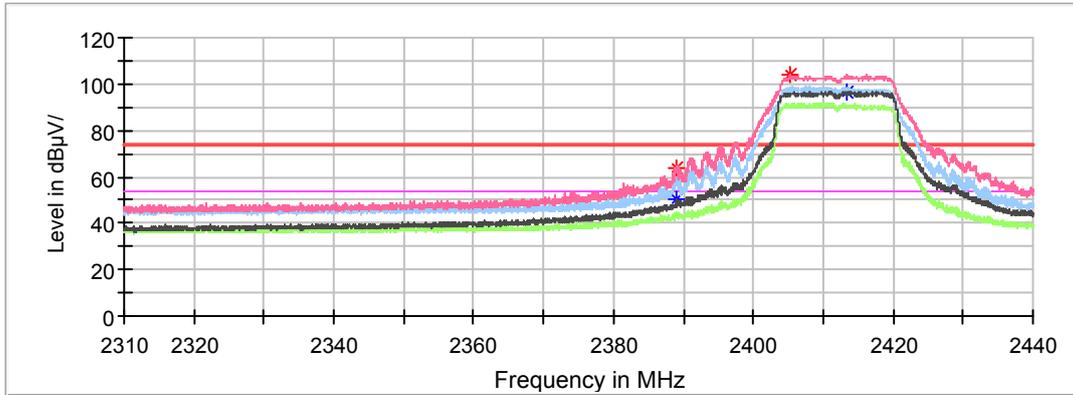

Right Side

Full Spectrum

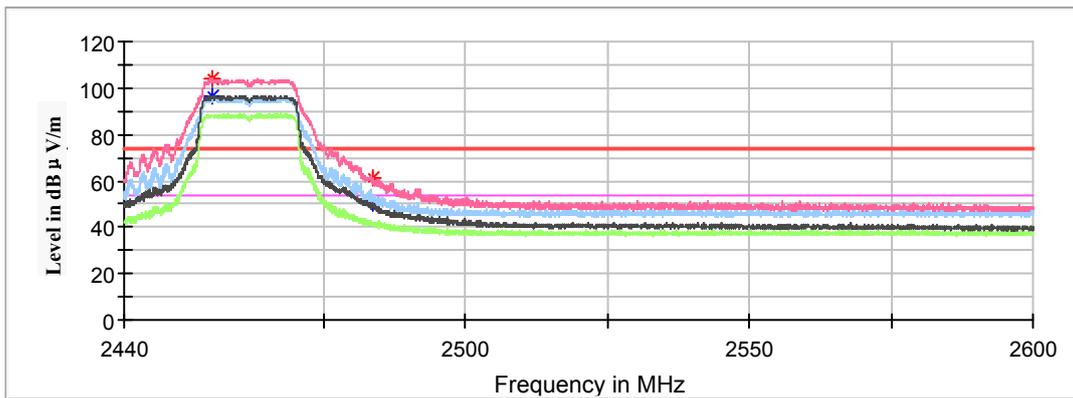


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2389.04	---	50.29	200.0	V	101.0	2.8	54.00	3.71
2389.04	64.17	---	200.0	V	101.0	2.8	74.00	9.83
High Channel: 2462MHz								
2483.68	---	50.22	250.0	V	114.0	3.0	54.00	3.78
2483.68	60.84	---	250.0	V	114.0	3.0	74.00	13.16

802.11n-HT20 Mode: (Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)


Left Side

Full Spectrum

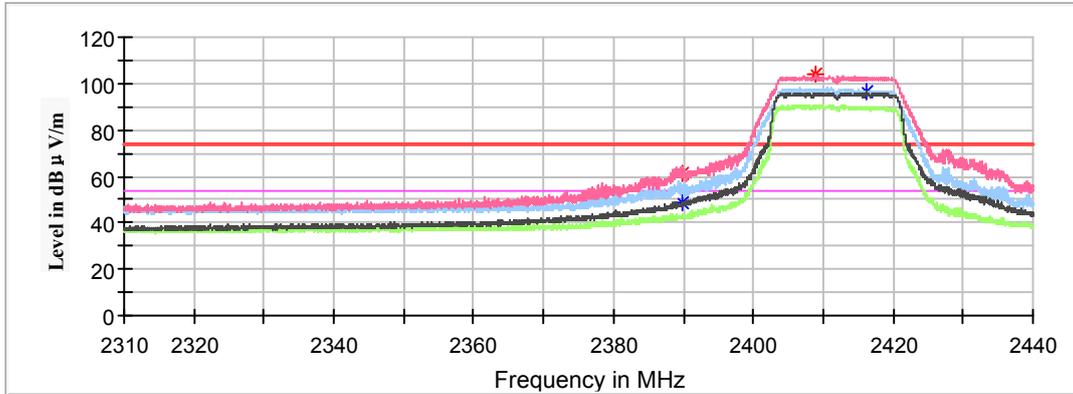

Right Side

Full Spectrum

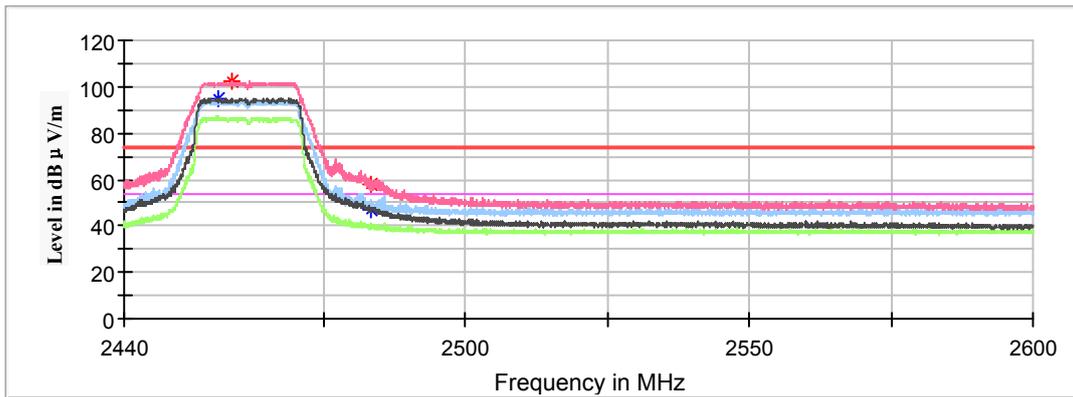


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2389.90	---	48.78	200.0	V	64.0	2.8	54.00	5.22
2389.90	61.35	---	200.0	V	64.0	2.8	74.00	12.65
High Channel: 2462MHz								
2483.55	---	47.31	150.0	V	282.0	3.0	54.00	6.69
2483.55	57.89	---	150.0	V	282.0	3.0	74.00	16.11

802.11n-HT40 Mode: (Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)


Left Side

Full Spectrum

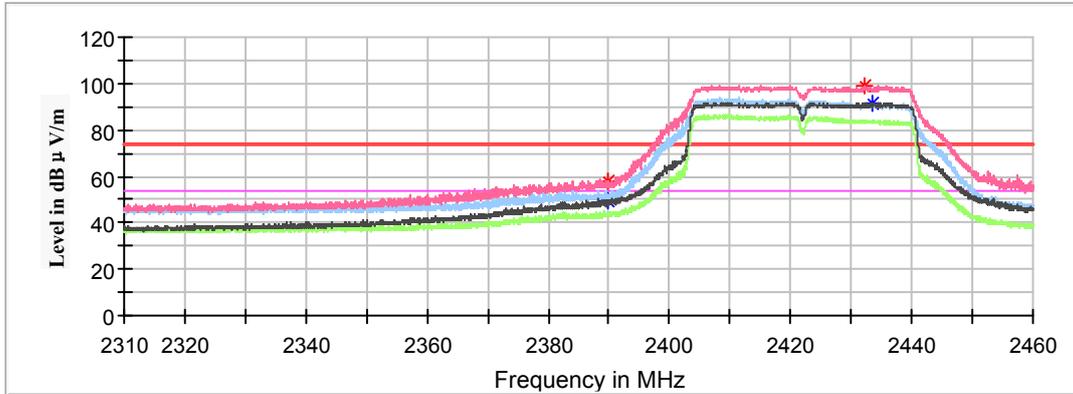

Right Side


Full Spectrum

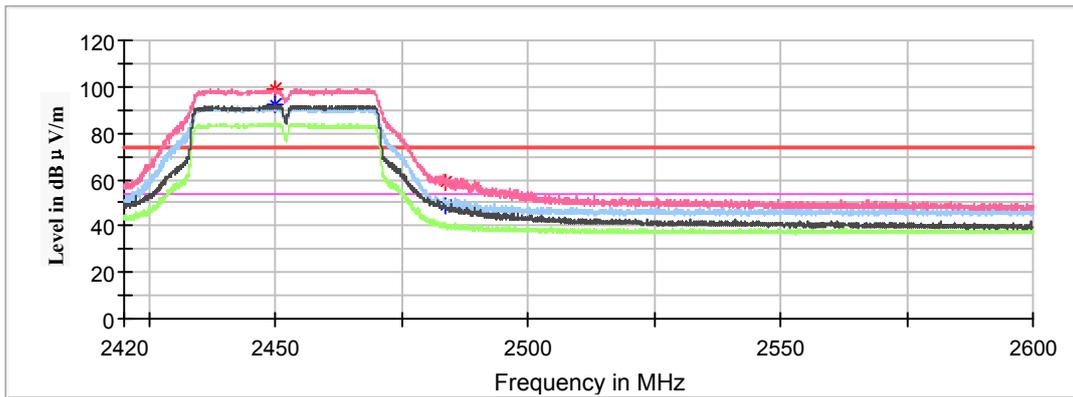


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2422MHz								
2389.92	---	49.19	150.0	V	49.0	2.8	54.00	4.81
2389.92	58.18	---	150.0	V	49.0	2.8	74.00	15.82
High Channel: 2452MHz								
2483.68	---	48.98	200.0	V	59.0	3.0	54.00	5.02
2483.68	59.10	---	200.0	V	59.0	3.0	74.00	14.90

Conducted Spurious Emissions at Antenna Port


802.11b Mode Low Channel

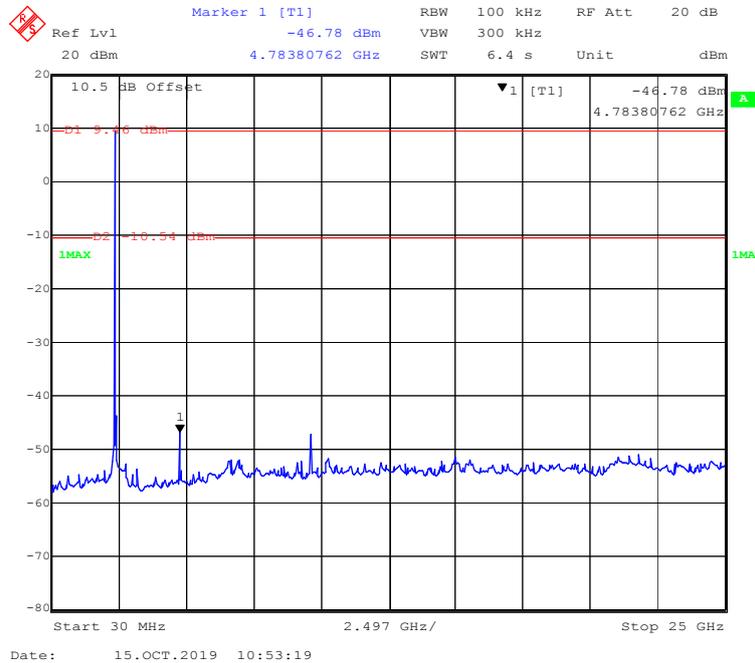


802.11b Mode Middle Channel

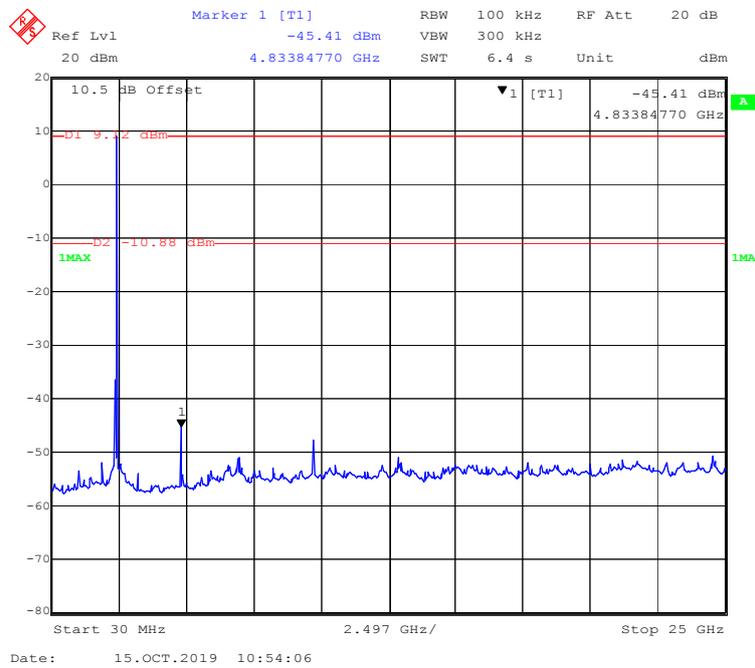


802.11b Mode High Channel

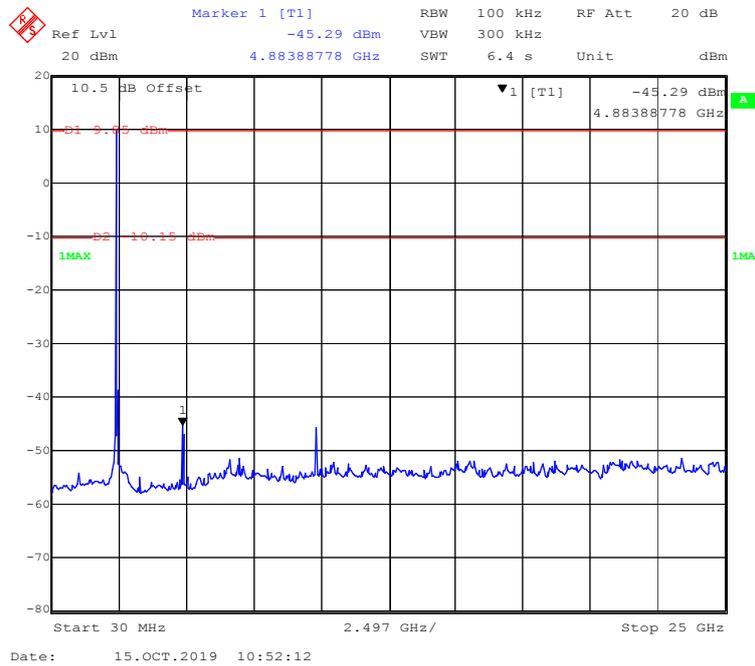


802.11g Mode Low Channel

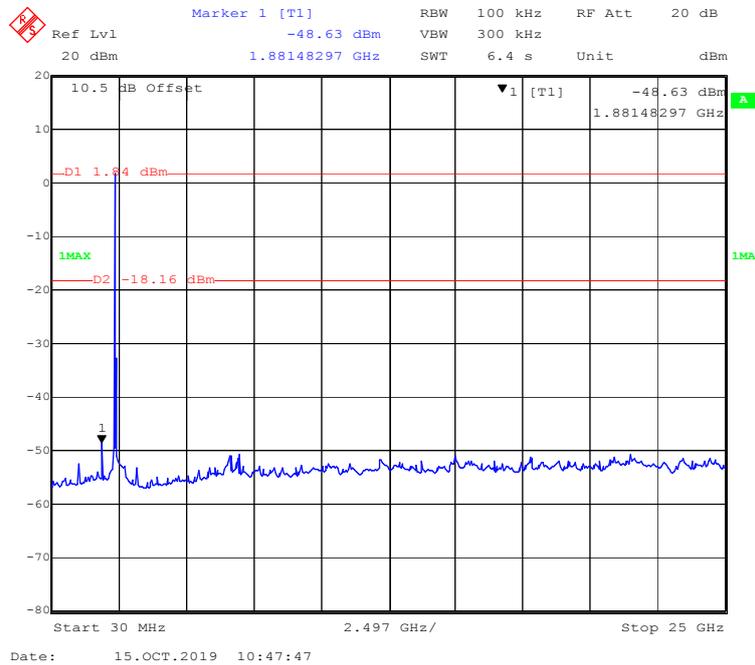

802.11n-HT40 Mode Middle Channel

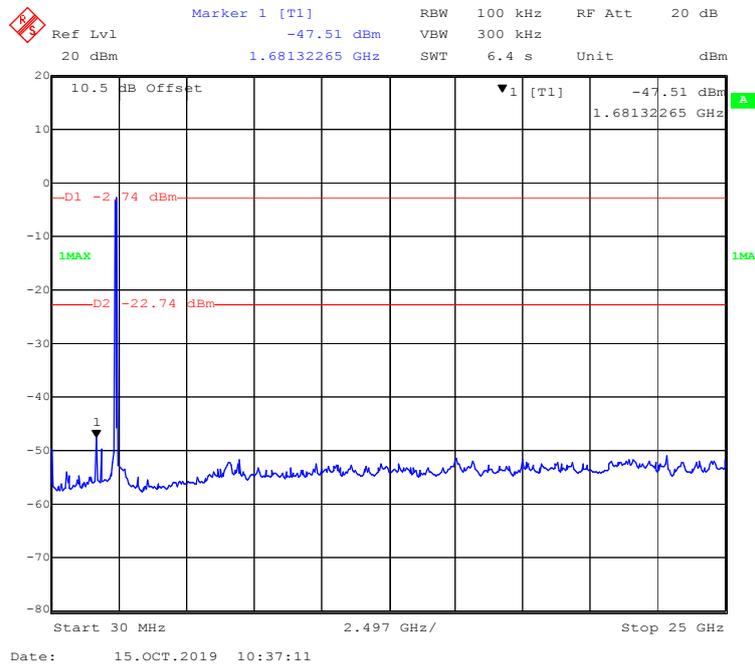

802.11n-HT40 Mode High Channel

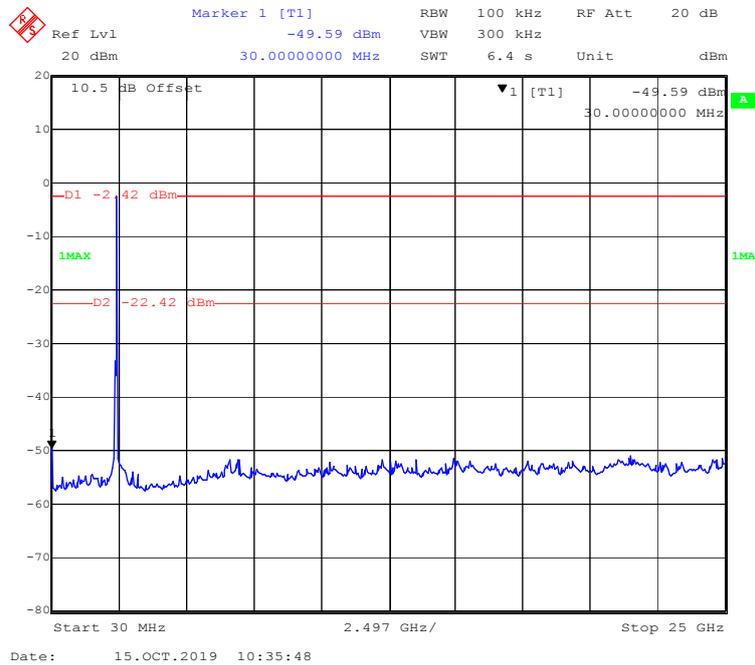

FCC §15.247(a) (2) - 6 dB EMISSION BANDWIDTH


Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 * \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	51 %
ATM Pressure:	101.3 kPa


The testing was performed by Jack Jiao on 2019-10-15.

EUT operation mode: Transmitting


Test Result: Compliant.

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
802.11b Mode			
Low	2412	9.980	≥ 0.5
Middle	2437	9.980	≥ 0.5
High	2462	9.980	≥ 0.5
802.11g Mode			
Low	2412	16.593	≥ 0.5
Middle	2437	16.593	≥ 0.5
High	2462	16.593	≥ 0.5
802.11n-HT20 Mode			
Low	2412	17.916	≥ 0.5
Middle	2437	17.856	≥ 0.5
High	2462	17.856	≥ 0.5
802.11n-HT40 Mode			
Low	2422	36.673	≥ 0.5
Middle	2437	36.673	≥ 0.5
High	2452	36.673	≥ 0.5


802.11b Mode Low Channel

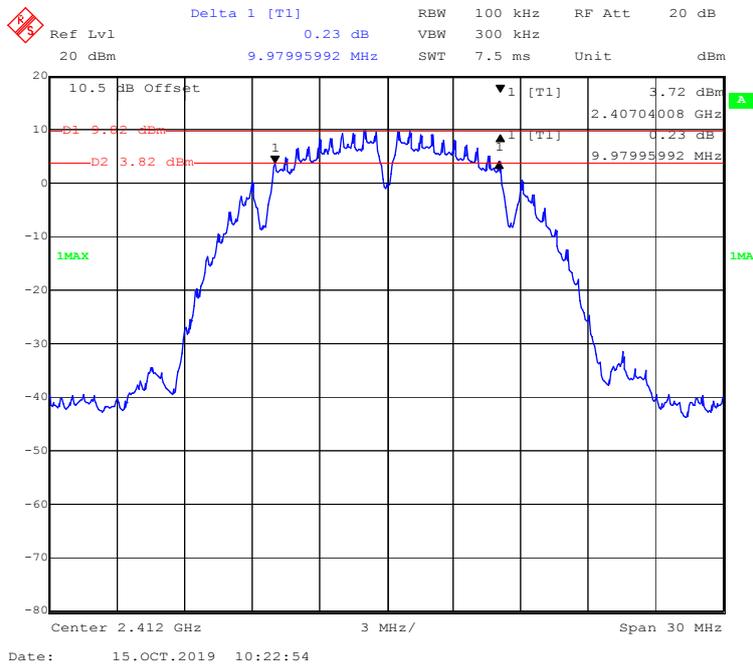


802.11b Mode Middle Channel

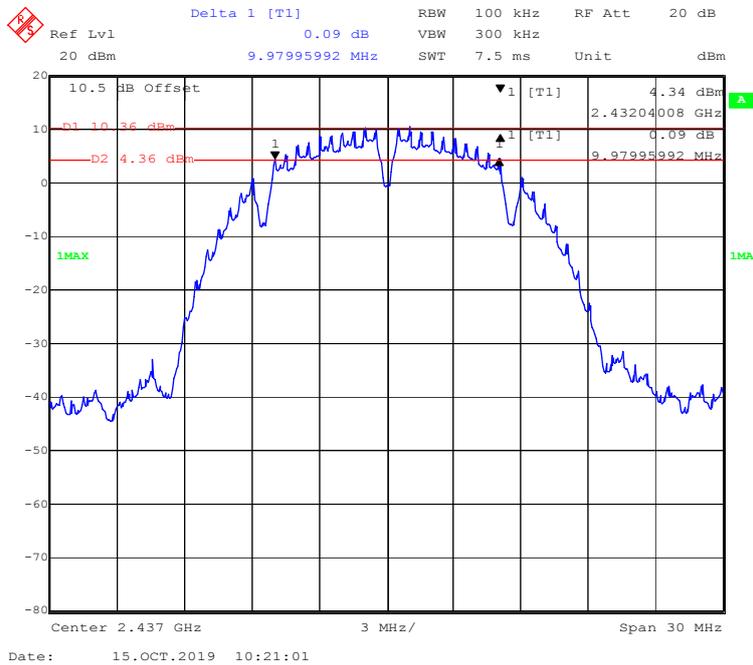


802.11b Mode High Channel

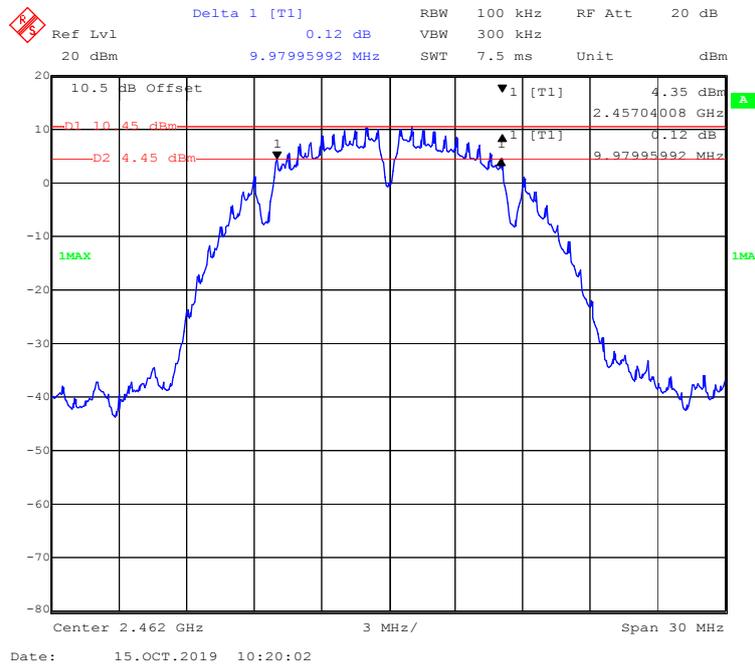


802.11g Mode Low Channel

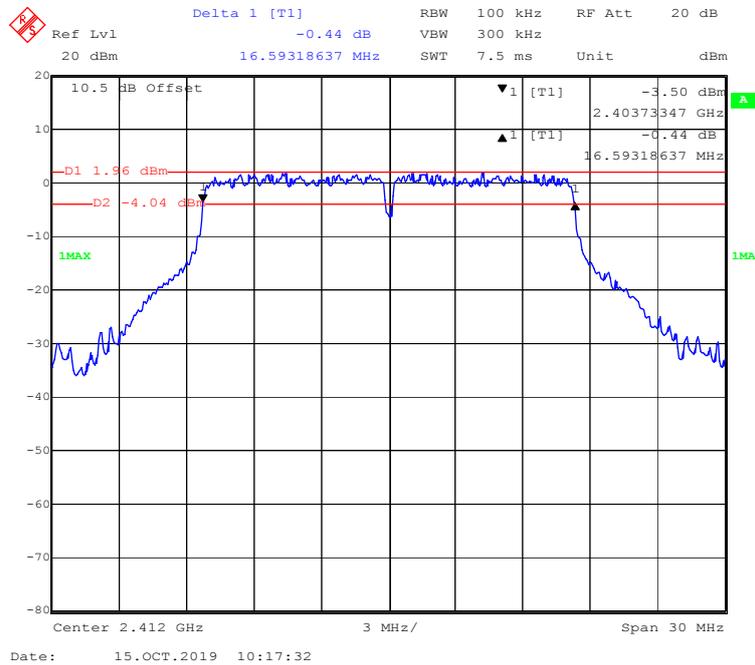


802.11g Mode Middle Channel

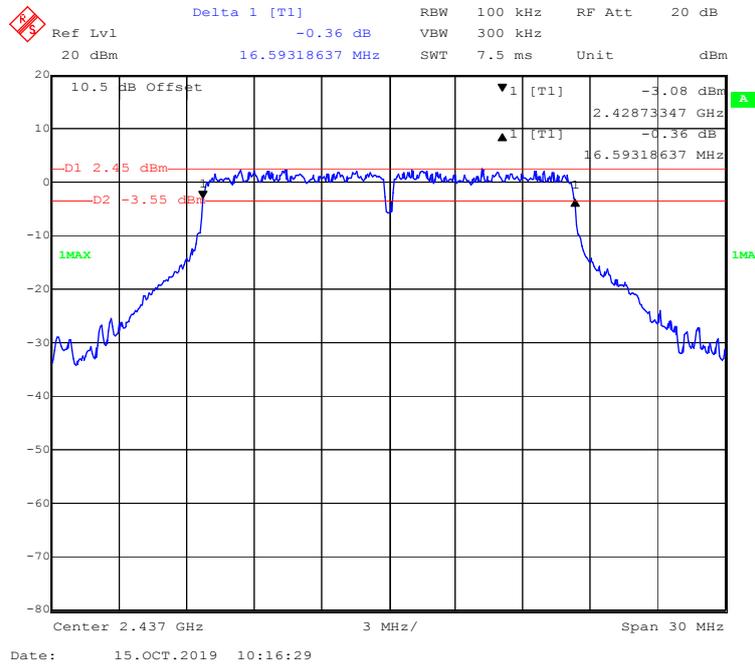


802.11g Mode High Channel

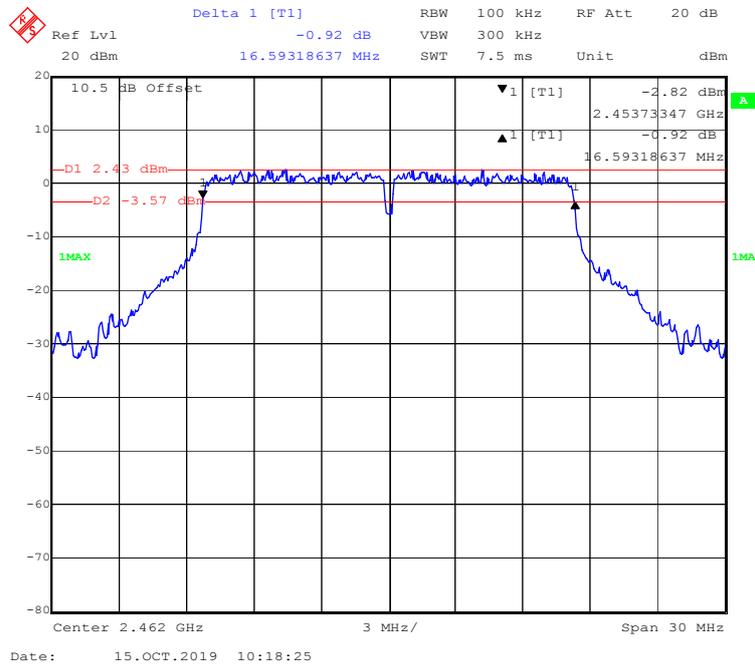


802.11n-HT20 Mode Low Channel

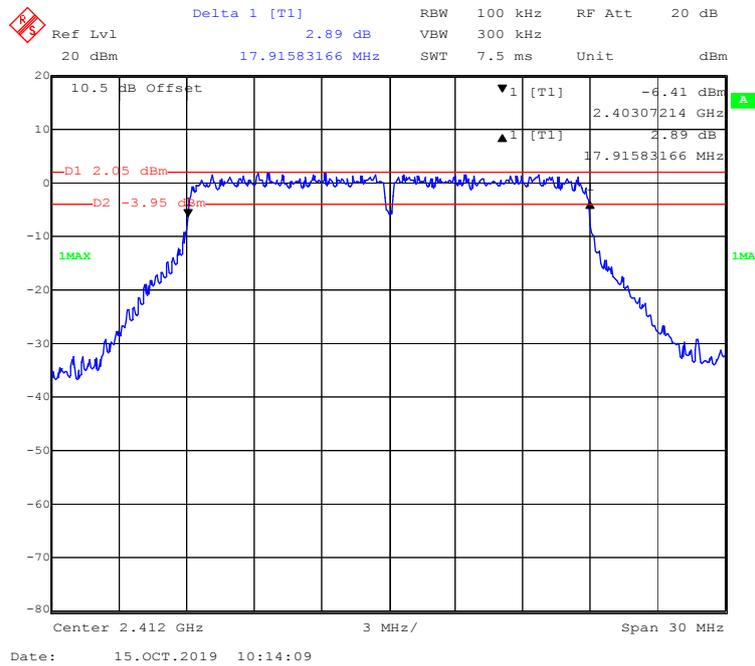


802.11n-HT20 Mode Middle Channel

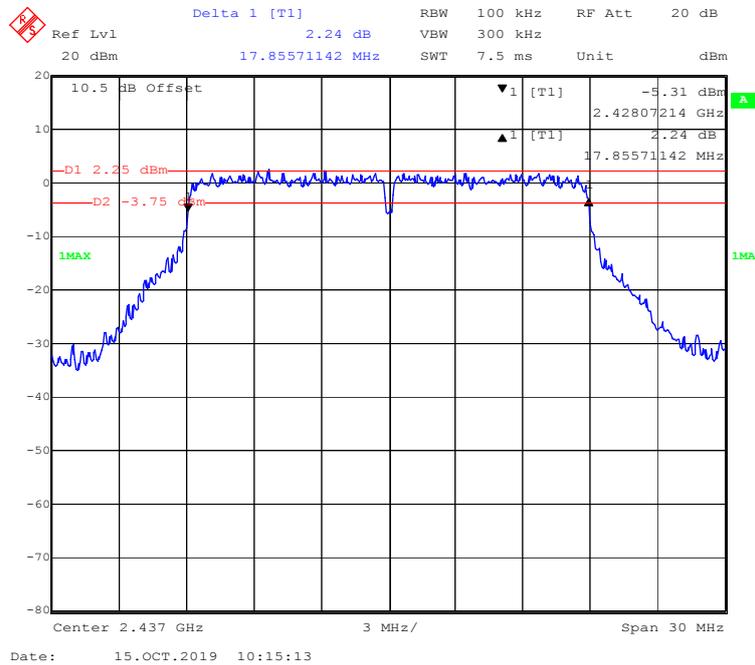


802.11n-HT20 Mode High Channel

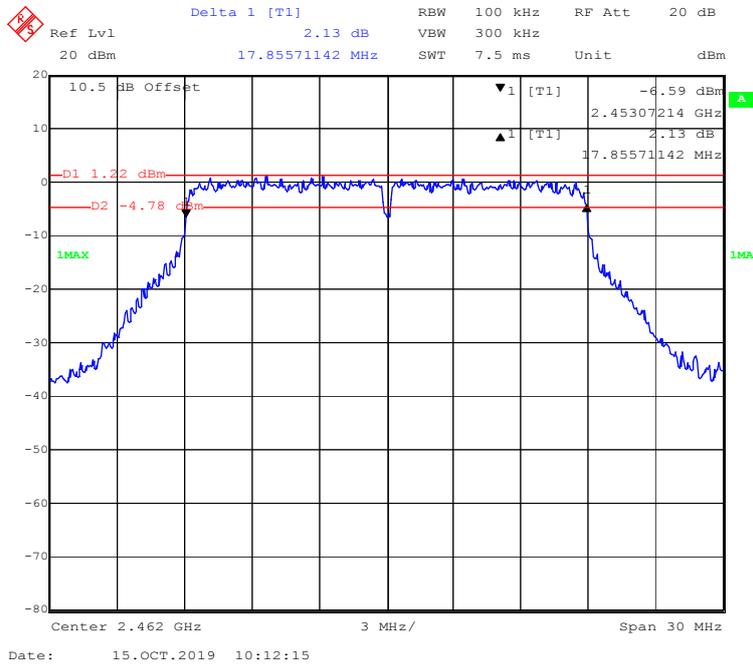


802.11n-HT40 Mode Low Channel

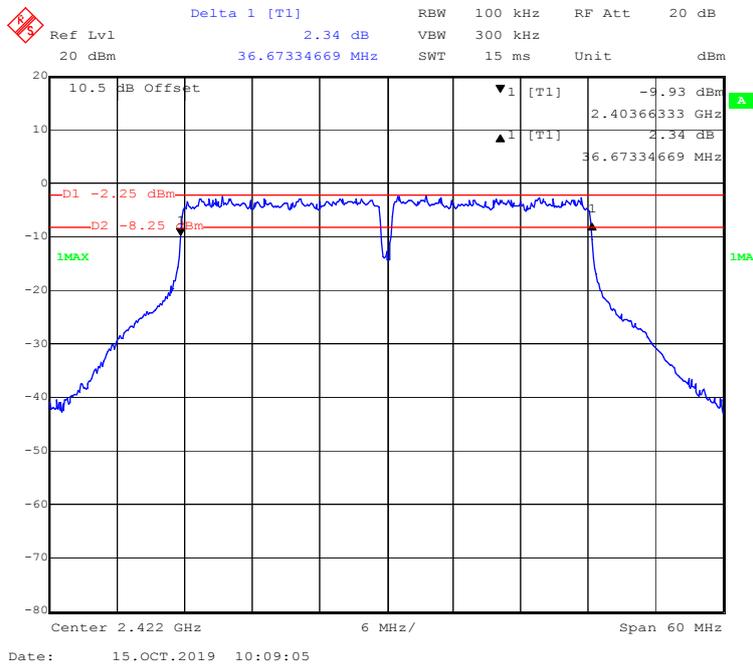

802.11n-HT40 Mode Middle Channel

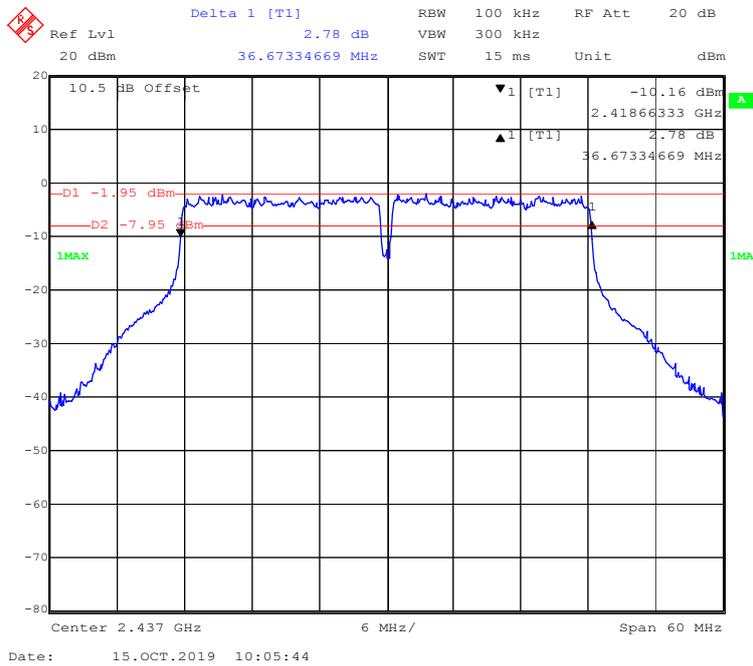

802.11n-HT40 Mode High Channel

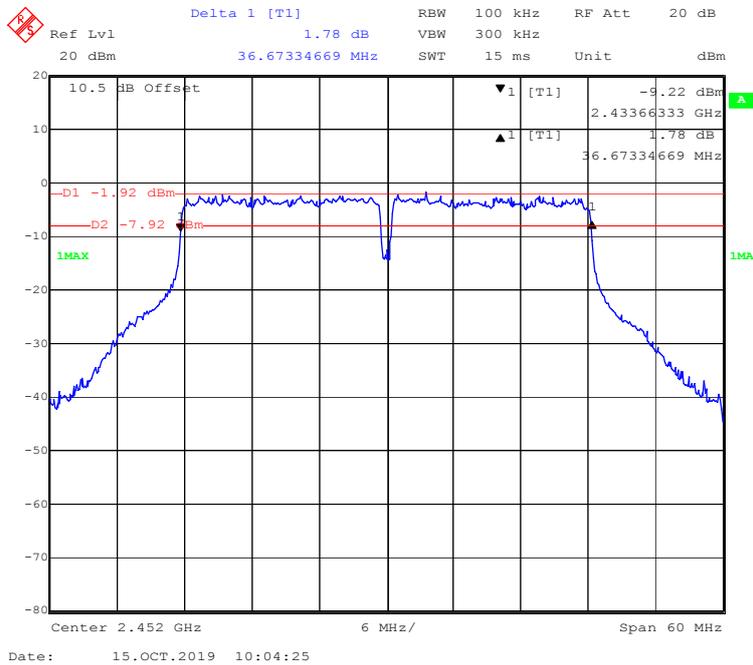

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard


According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, Compliant with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.9.1.3

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	23.7 °C
Relative Humidity:	54 %
ATM Pressure:	101.2 kPa

The testing was performed by Jack Jiao on 2019-10-15.

EUT operation mode: Transmitting

Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
802.11b Mode				
Low	2412	21.06	30	Pass
Middle	2437	21.05	30	Pass
High	2462	21.14	30	Pass
802.11g Mode				
Low	2412	22.07	30	Pass
Middle	2437	22.75	30	Pass
High	2462	22.27	30	Pass
802.11n-HT20 Mode				
Low	2412	22.46	30	Pass
Middle	2437	22.01	30	Pass
High	2462	23.06	30	Pass
802.11n-HT40 Mode				
Low	2422	22.30	30	Pass
Middle	2437	22.49	30	Pass
High	2452	22.53	30	Pass

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates Compliant with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to ANSI C63.10-2013 sub-clause 6.10.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions


Temperature:	24.5 °C
Relative Humidity:	51 %
ATM Pressure:	101.5 kPa

The testing was performed by Jack Jiao on 2019-10-15.


EUT operation mode: Transmitting

Test Result: Compliant


802.11b Mode Left Side

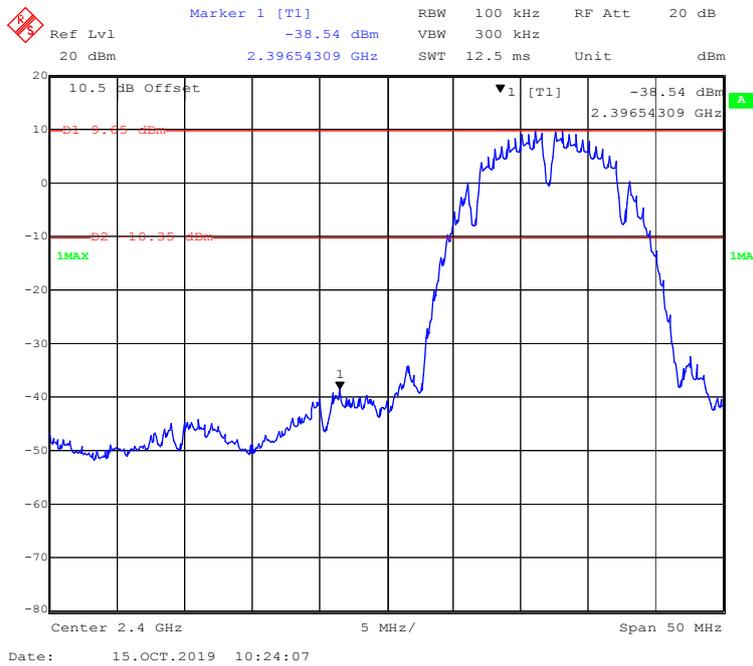


802.11b Mode Right Side

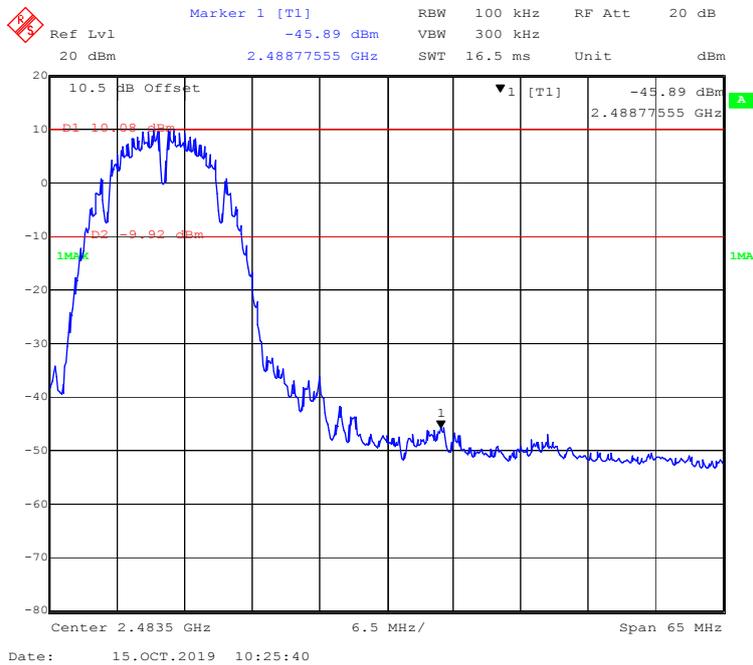


802.11g Mode Left Side

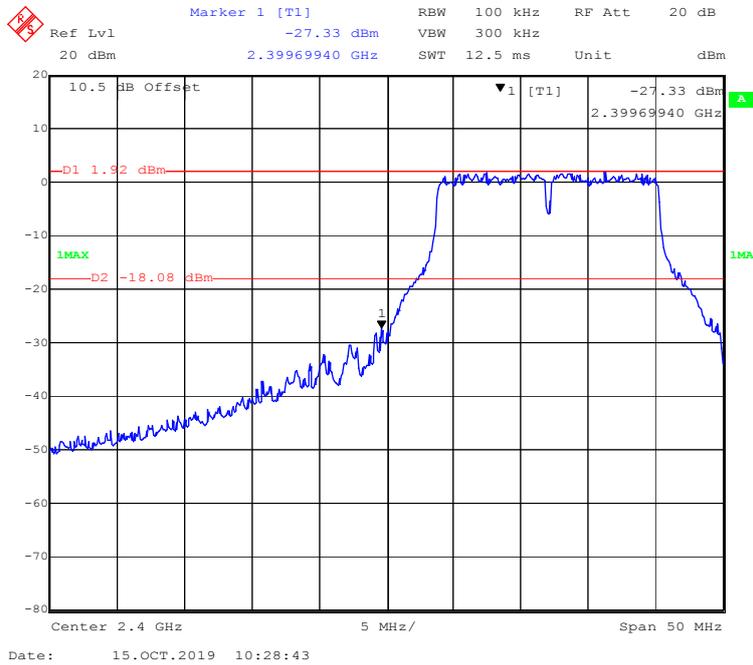


802.11g Mode Right Side

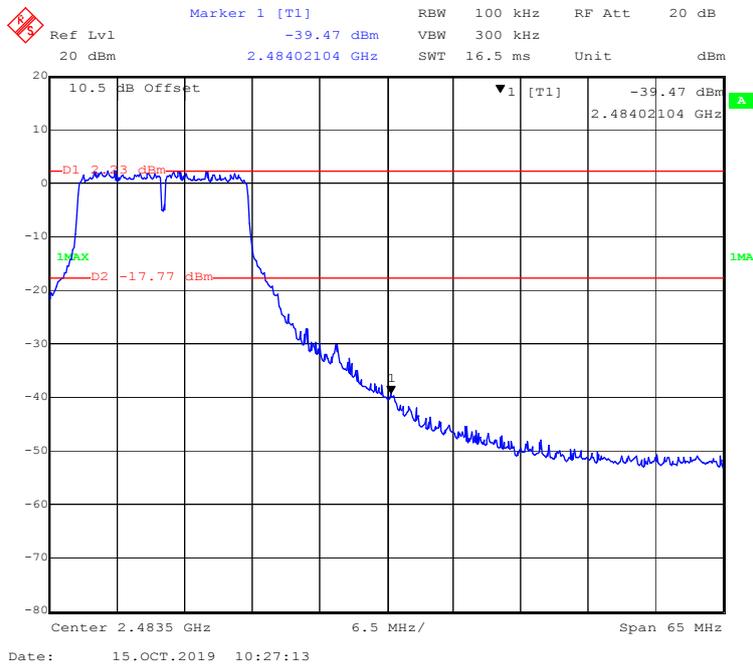


802.11n-HT20 Mode Left Side

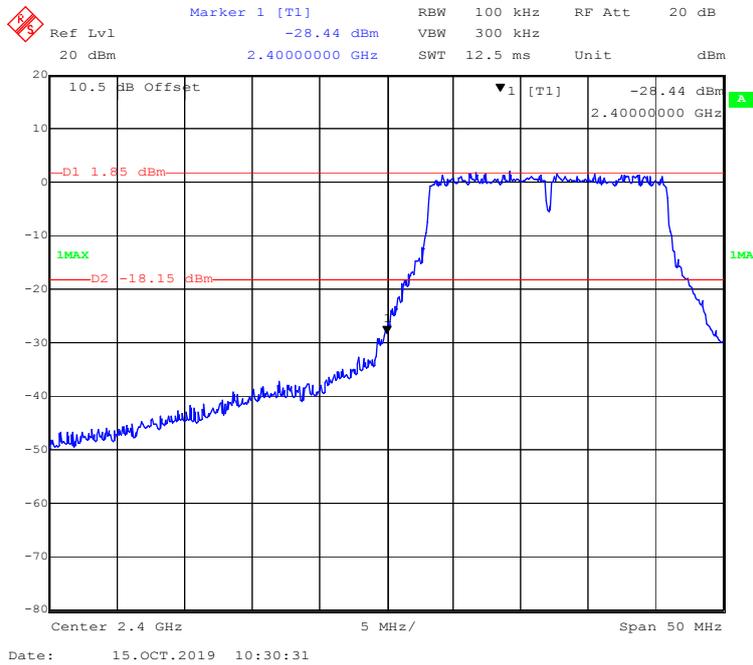


802.11n-HT20 Mode Right Side

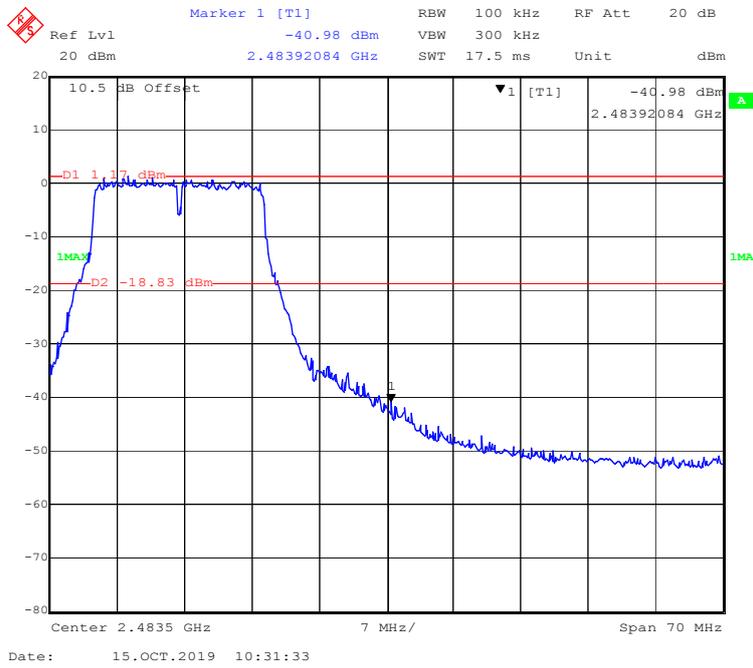

802.11n-HT40 Mode Left Side

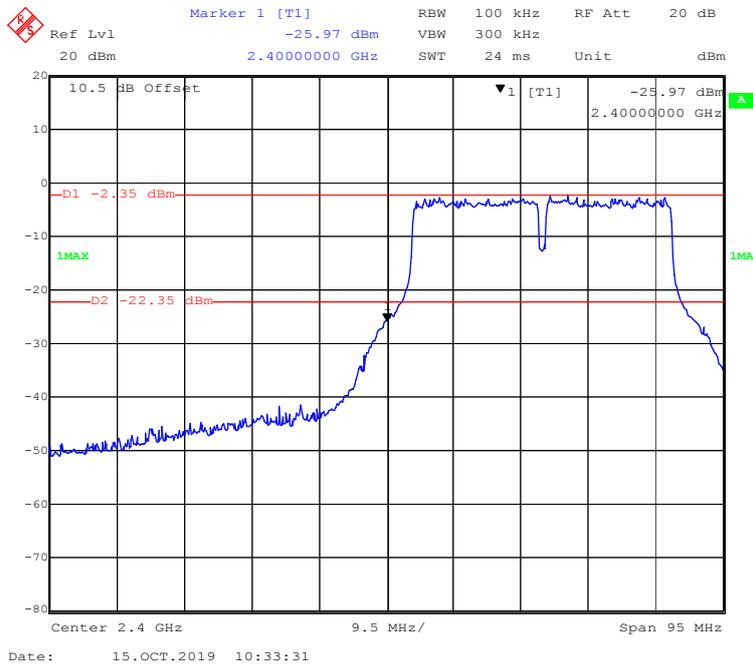

802.11n-HT40 Mode Right Side

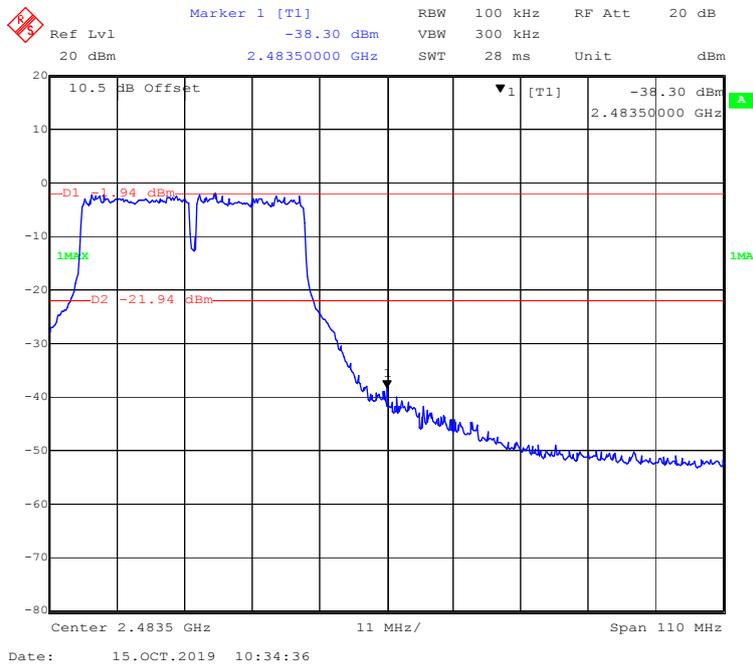

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.10.2

The following procedure shall be used if maximum peak conducted output power was used to determine Compliant, and it is optional if the maximum conducted (average) output power was used to determine Compliant:

1. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
2. Set the VBW $\geq 3 \times \text{RBW}$.
3. Set the span to 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.
9. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Data

Environmental Conditions

Temperature:	24.3 °C
Relative Humidity:	52 %
ATM Pressure:	101.5 kPa


The testing was performed by Jack Jiao on 2019-10-15.

EUT operation mode: Transmitting


Test Result: Compliant.

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
802.11b Mode			
Low	2412	-6.81	≤ 8
Middle	2437	-6.63	≤ 8
High	2462	-6.68	≤ 8
802.11g Mode			
Low	2412	-12.81	≤ 8
Middle	2437	-12.70	≤ 8
High	2462	-12.56	≤ 8
802.11n-HT20 mode			
Low	2412	-12.22	≤ 8
Middle	2437	-12.30	≤ 8
High	2462	-12.98	≤ 8
802.11n-HT40 Mode			
Low	2422	-16.34	≤ 8
Middle	2437	-15.91	≤ 8
High	2452	-15.83	≤ 8


802.11b Mode Low Channel

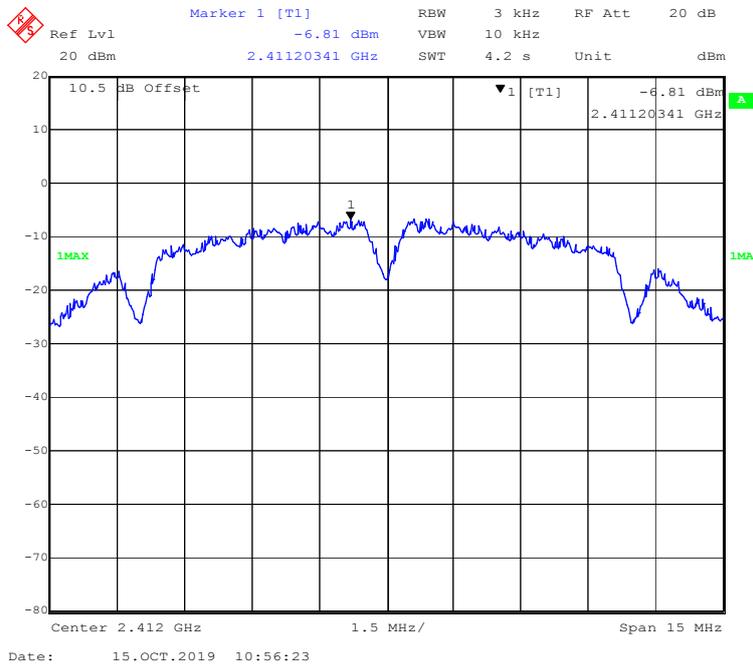


802.11b Mode Middle Channel

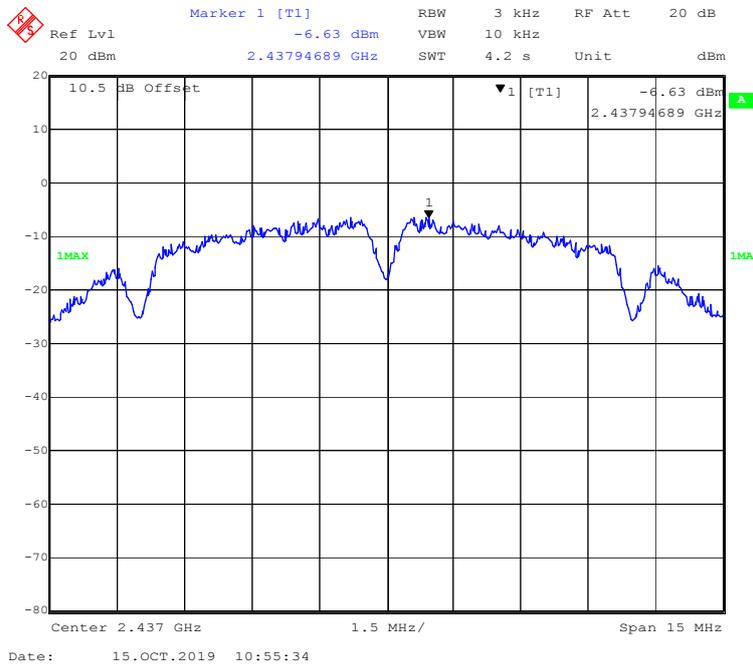


802.11b Mode High Channel

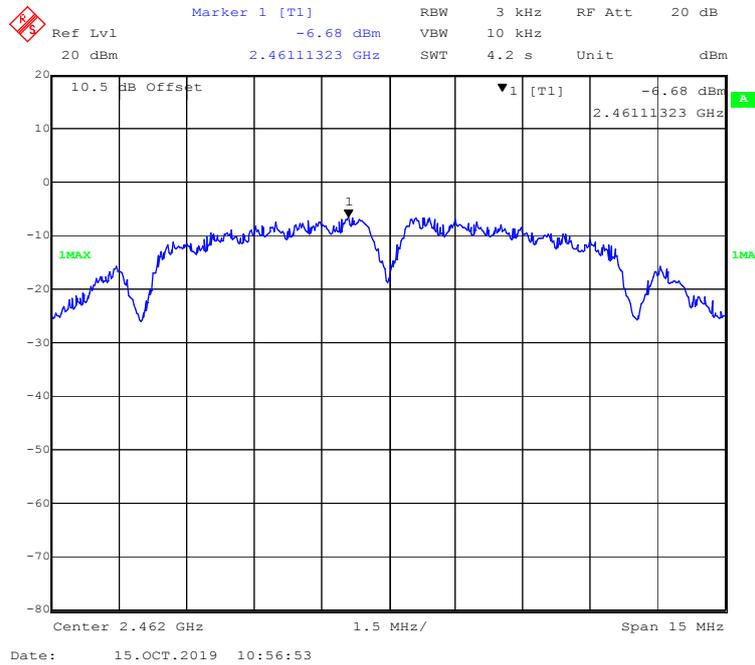


802.11g Mode Low Channel

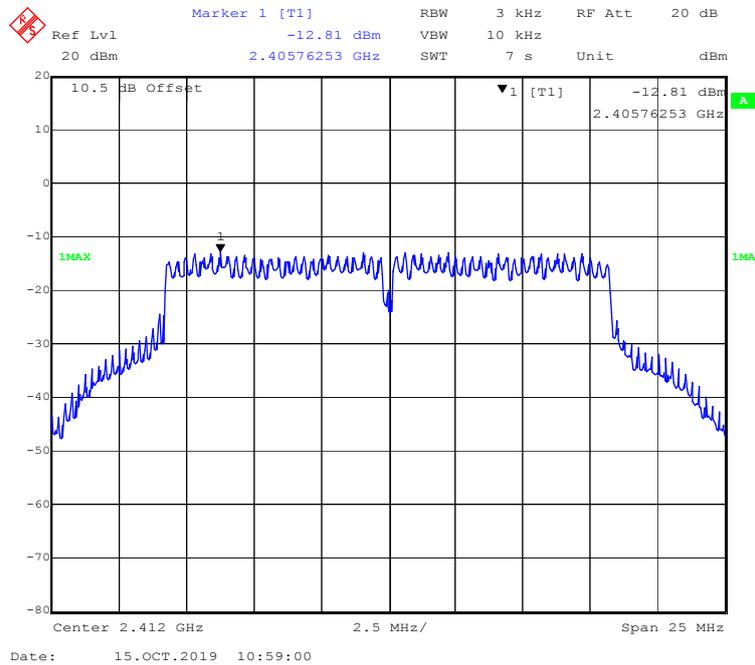


802.11g Mode Middle Channel

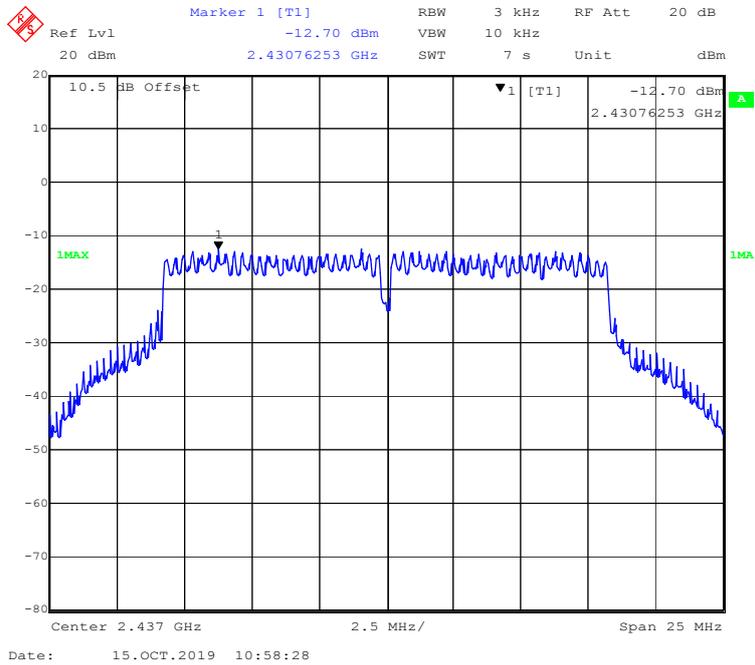


802.11g Mode High Channel

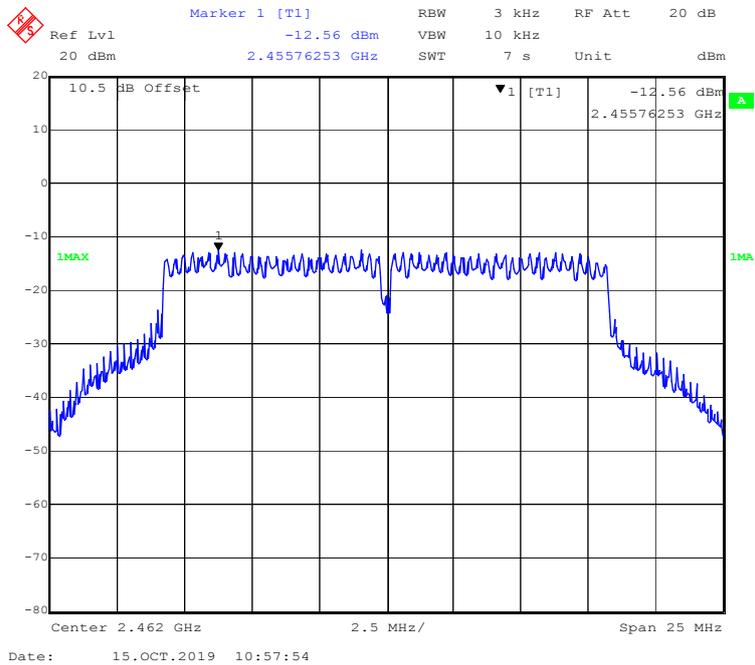


802.11n-HT20 Mode Low Channel

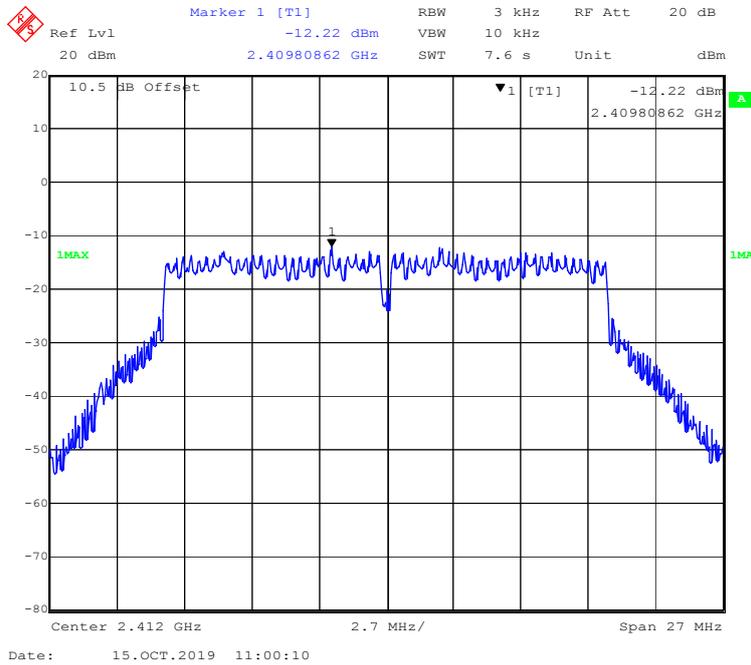


802.11n-HT20 Mode Middle Channel

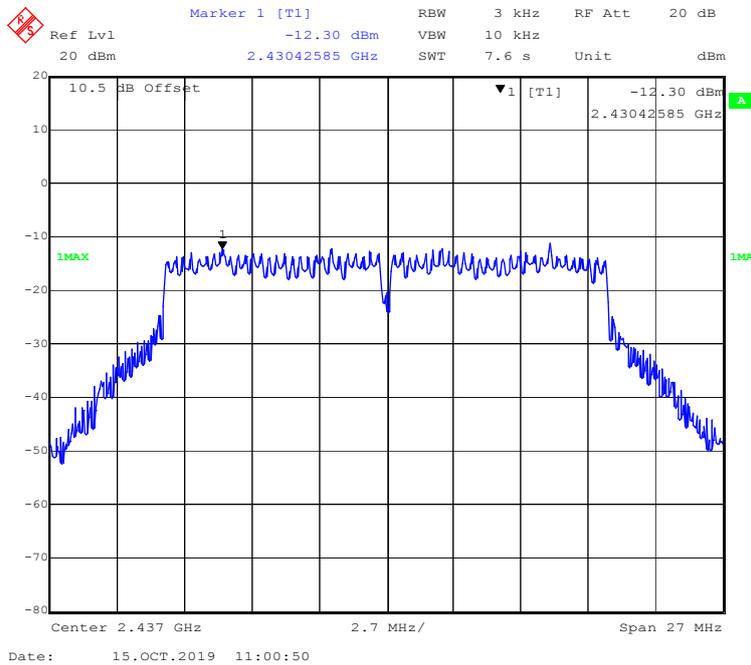


802.11n-HT20 Mode High Channel

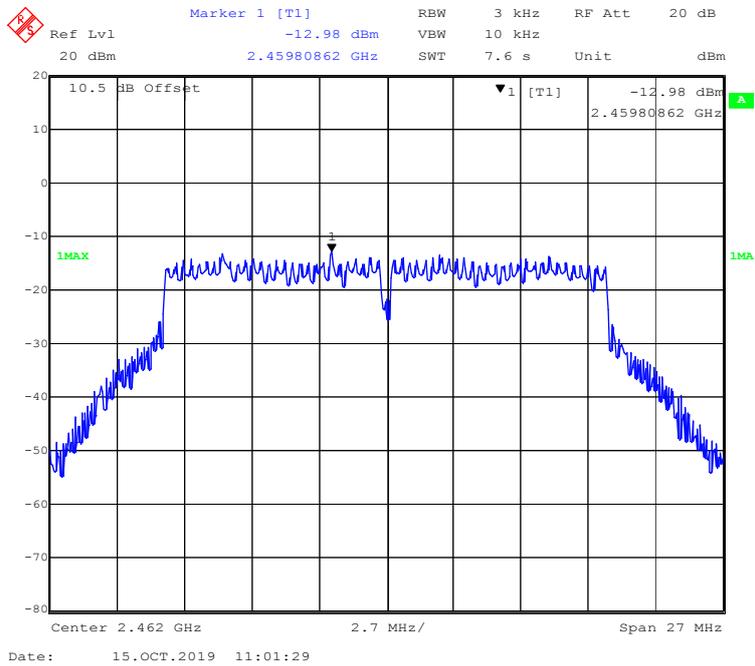


802.11n-HT40 Mode Low Channel

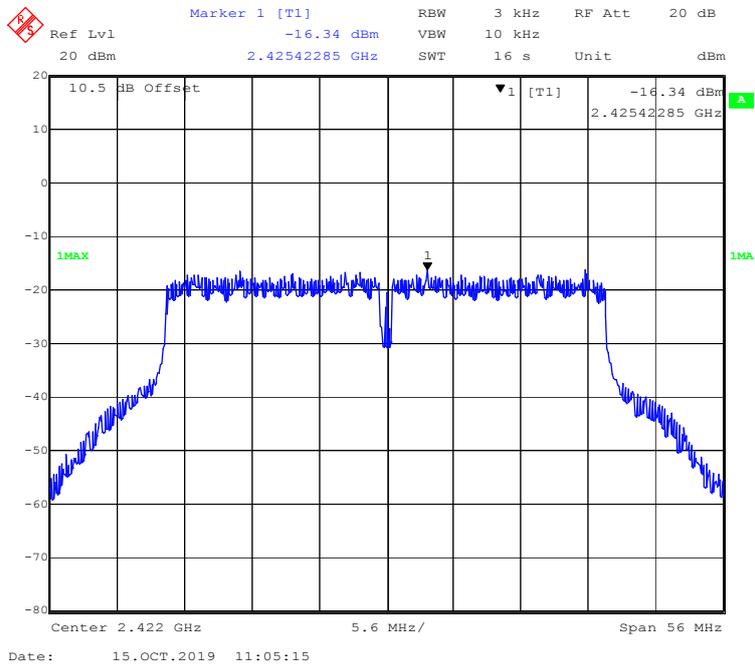

802.11n-HT40 Mode Middle Channel

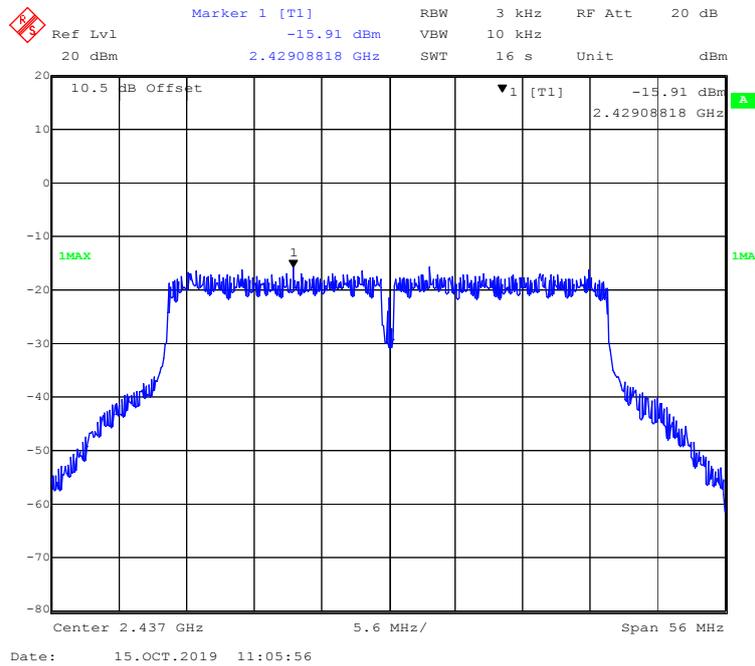

802.11n-HT40 Mode High Channel

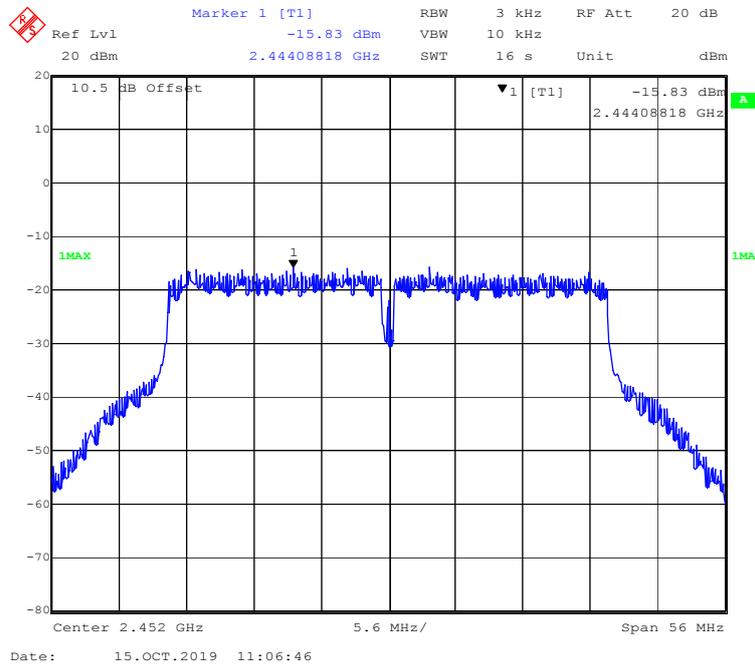

***** END OF REPORT *****